




US 20240075996A1

(19) **United States**(12) **Patent Application Publication**
HILMAN et al.(10) **Pub. No.: US 2024/0075996 A1**(43) **Pub. Date: Mar. 7, 2024**(54) **REMOVABLE UNIVERSAL LATERAL
TRACK EXTENSION SYSTEM****Publication Classification**(71) Applicants: **TOM HILMAN**, VANCOUVER, WA
(US); **MELVIN AHO**, VANCOUVER,
WA (US)(51) **Int. Cl.****B62D 55/084** (2006.01)**B62D 55/065** (2006.01)**B62D 55/12** (2006.01)(72) Inventors: **TOM HILMAN**, VANCOUVER, WA
(US); **MELVIN AHO**, VANCOUVER,
WA (US)(52) **U.S. Cl.**CPC **B62D 55/084** (2013.01); **B62D 55/065**
(2013.01); **B62D 55/12** (2013.01)(21) Appl. No.: **18/385,681**(22) Filed: **Oct. 31, 2023****Related U.S. Application Data**(63) Continuation of application No. 18/011,756, filed on
Dec. 20, 2022, now Pat. No. 11,845,502, filed as
application No. PCT/US2021/040216 on Jul. 1, 2021.(60) Provisional application No. 63/047,202, filed on Jul.
1, 2020.

(57)

ABSTRACT

A universal removable lateral track extension system includes an extension track assembly removably couplable outboard of an original lateral track at a selected displacement width, the assembly further including a track frame plate, first and second receiver hitches, a drive coupler removably couplable to the corresponding drive sprocket of the tracked equipment, the drive coupler including a drive bearing assembly and connected drive sprocket in line with the extension track rollers, a drive sprocket coupler and extension axle removably couplable from the drive sprocket connector to the drive bearing assembly, and a continuous track extending around the extension track rollers and drive coupler.

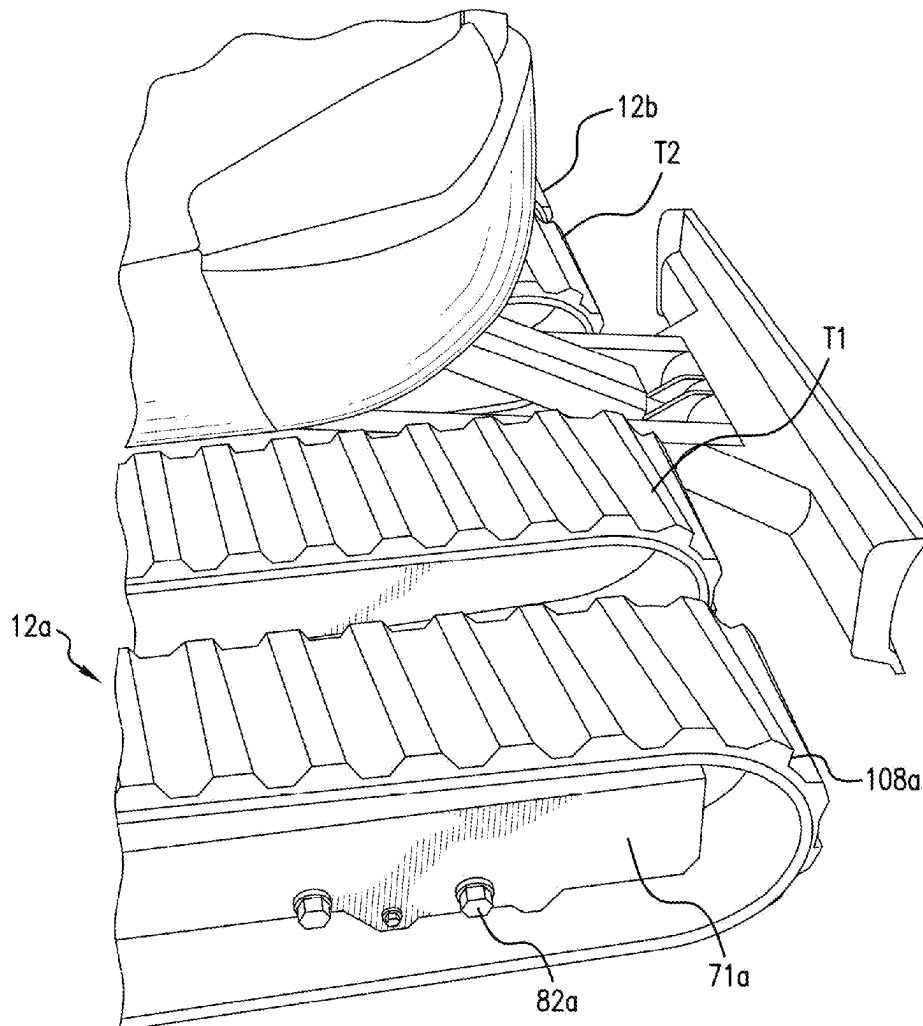

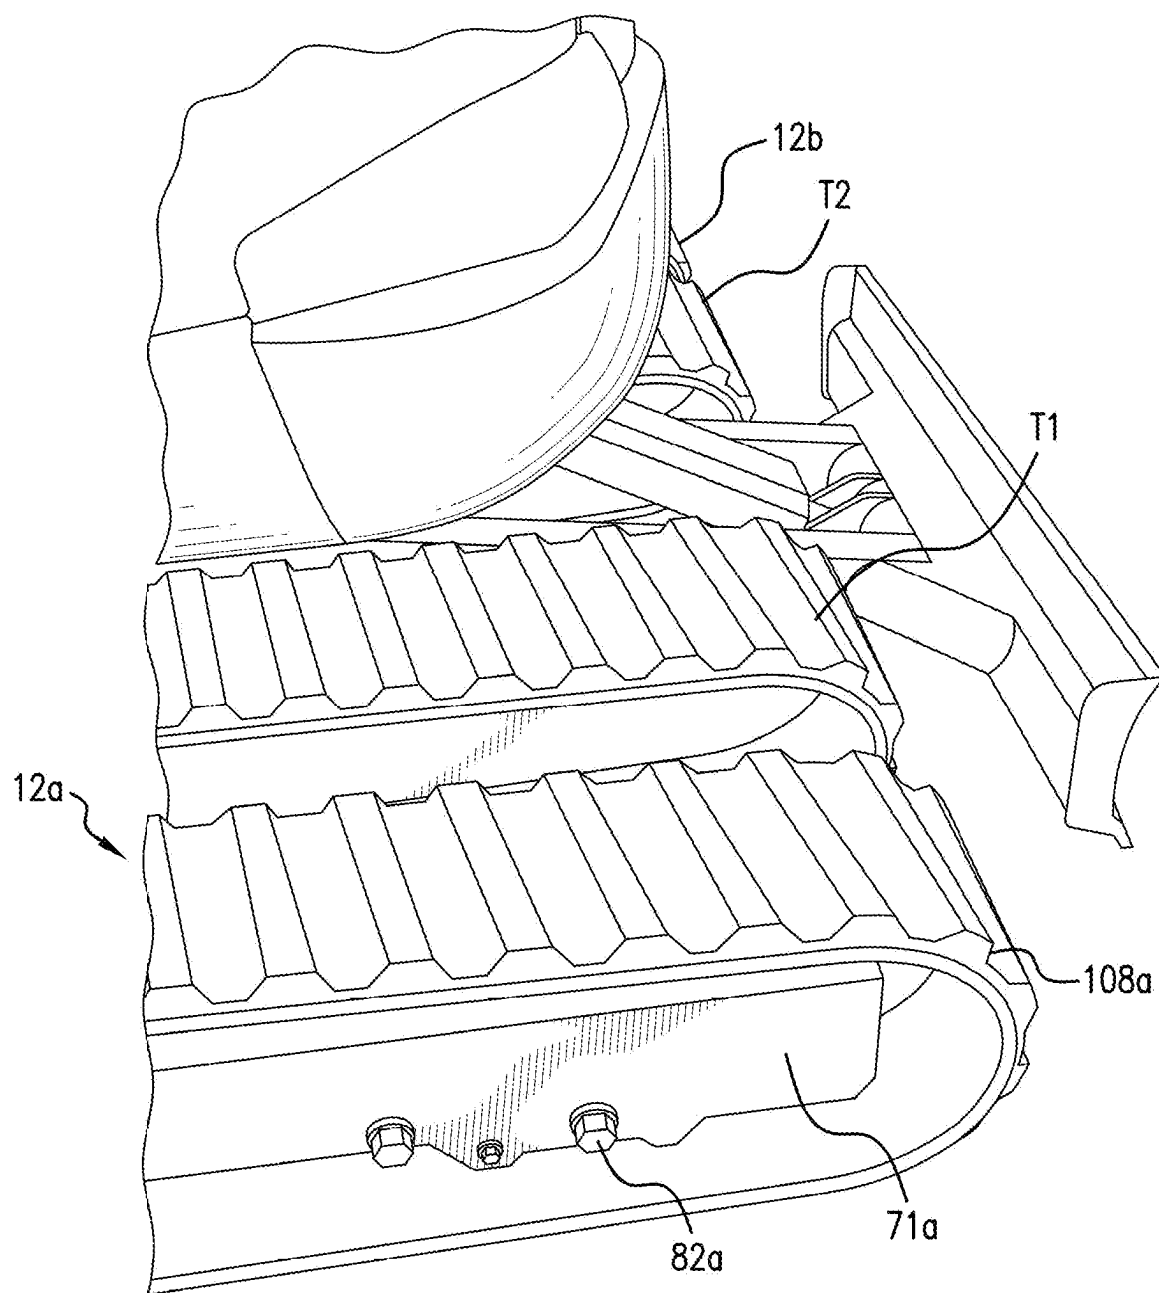


FIG. 1

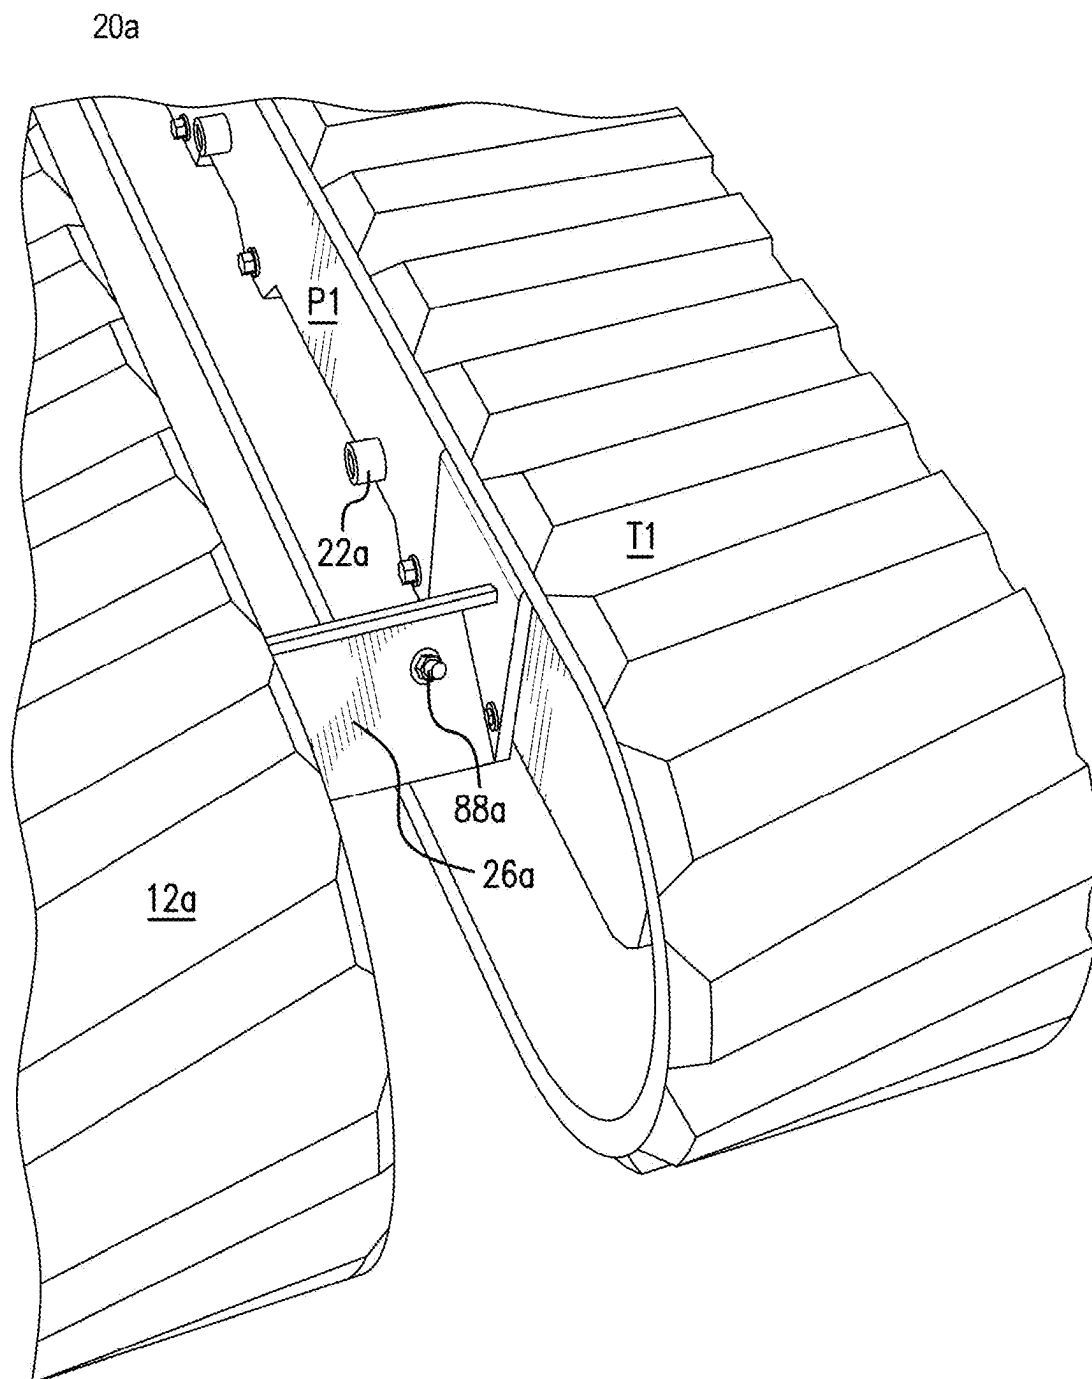


FIG. 2

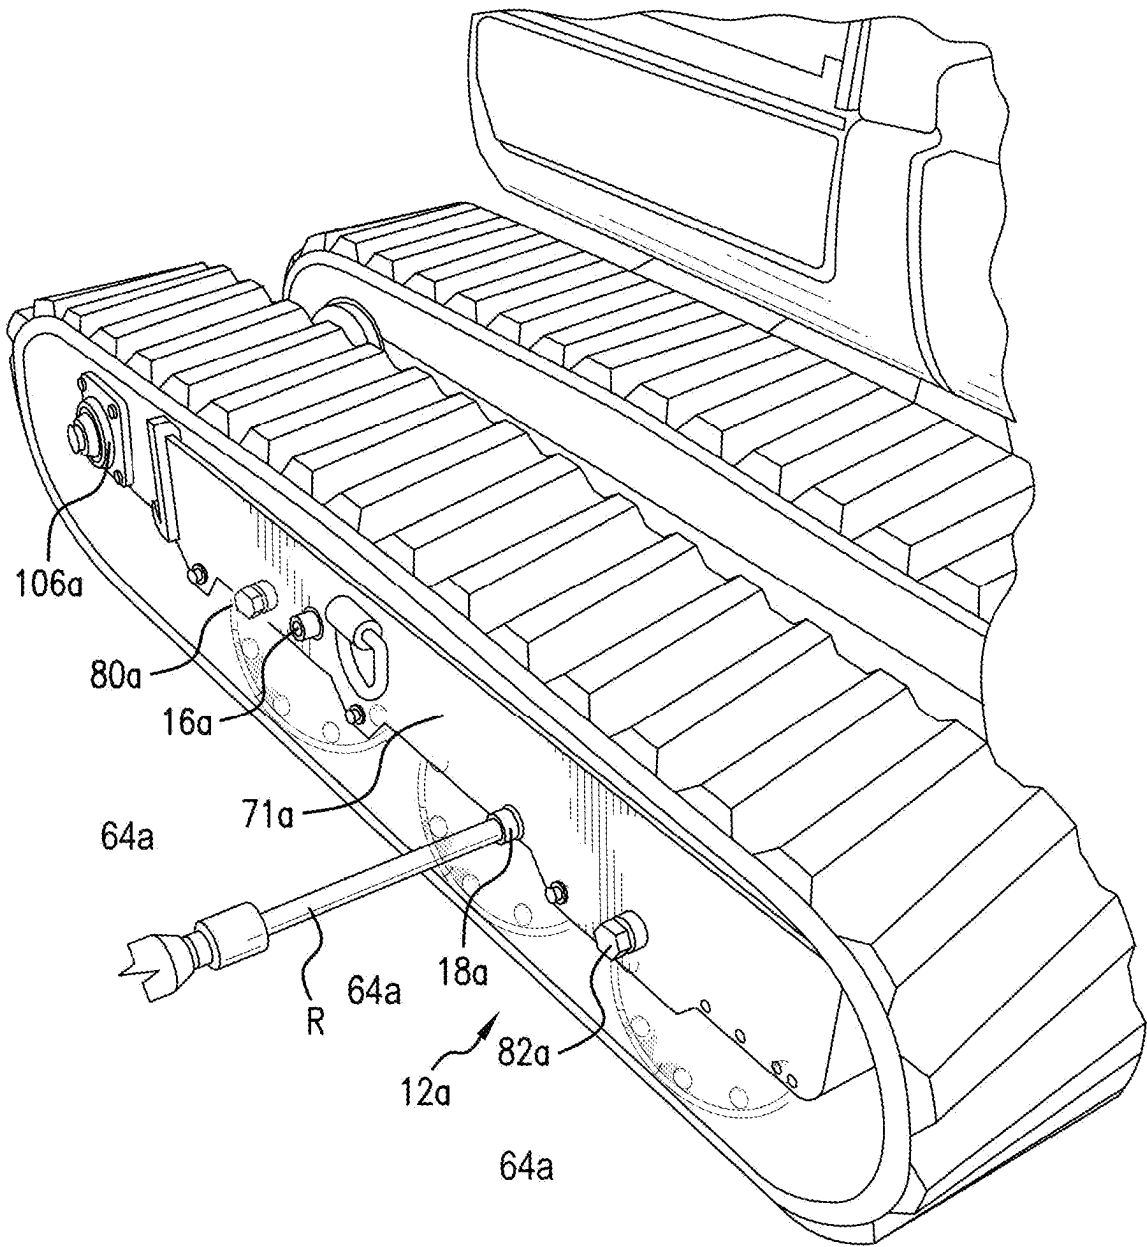


FIG.3

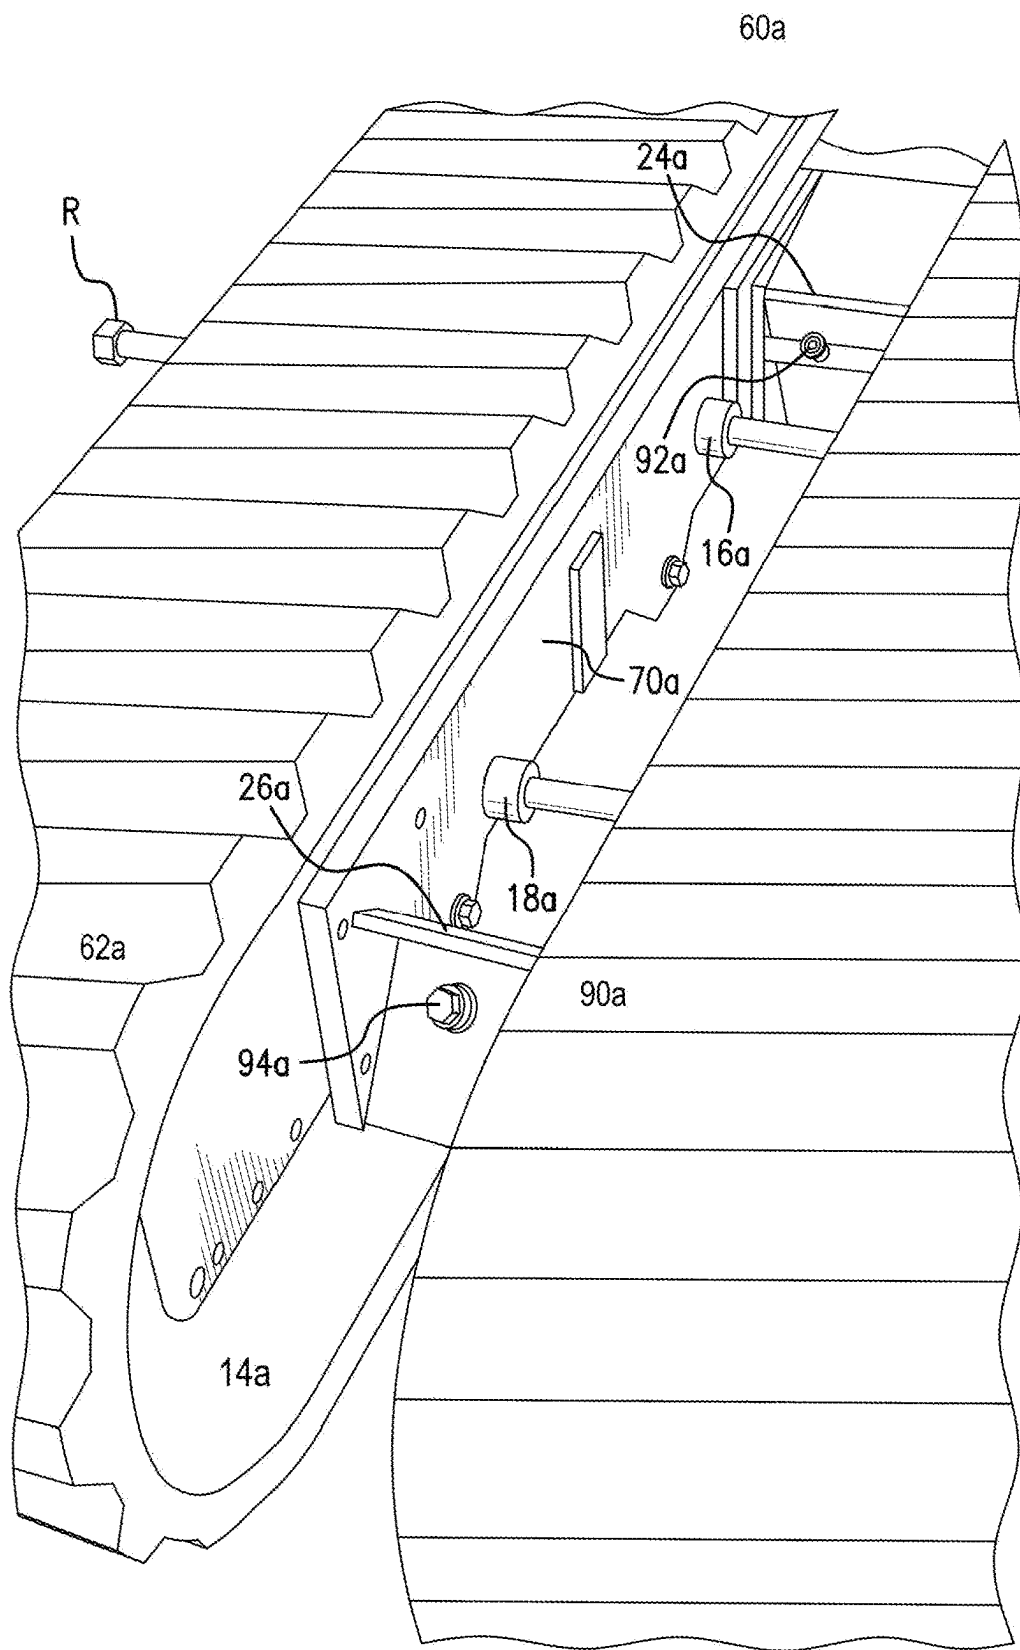


FIG. 4

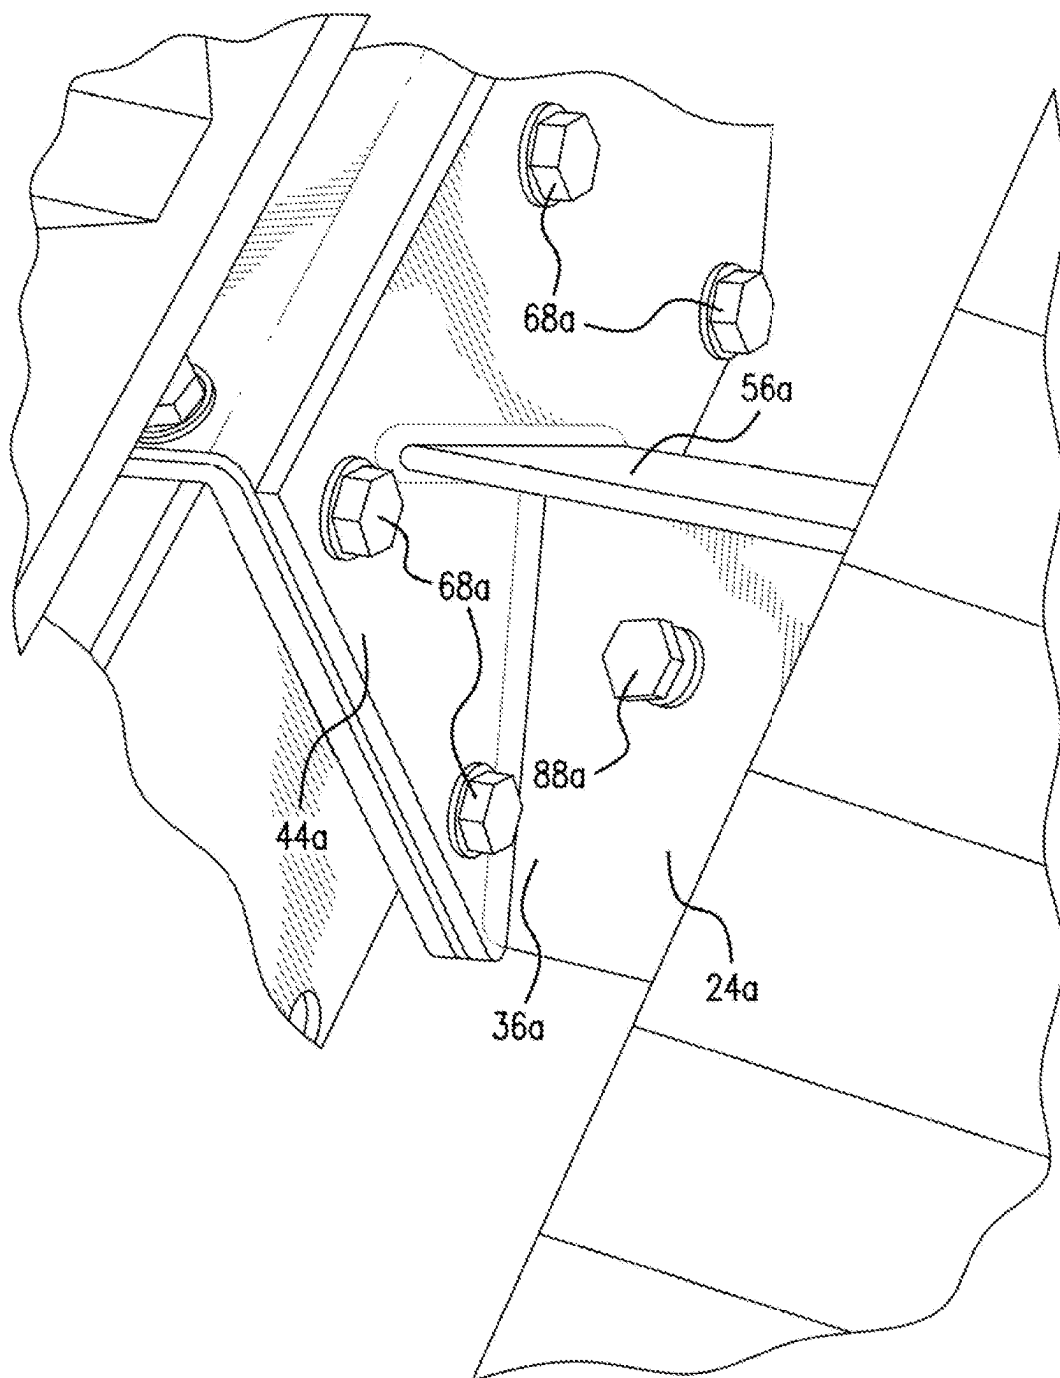


FIG. 5

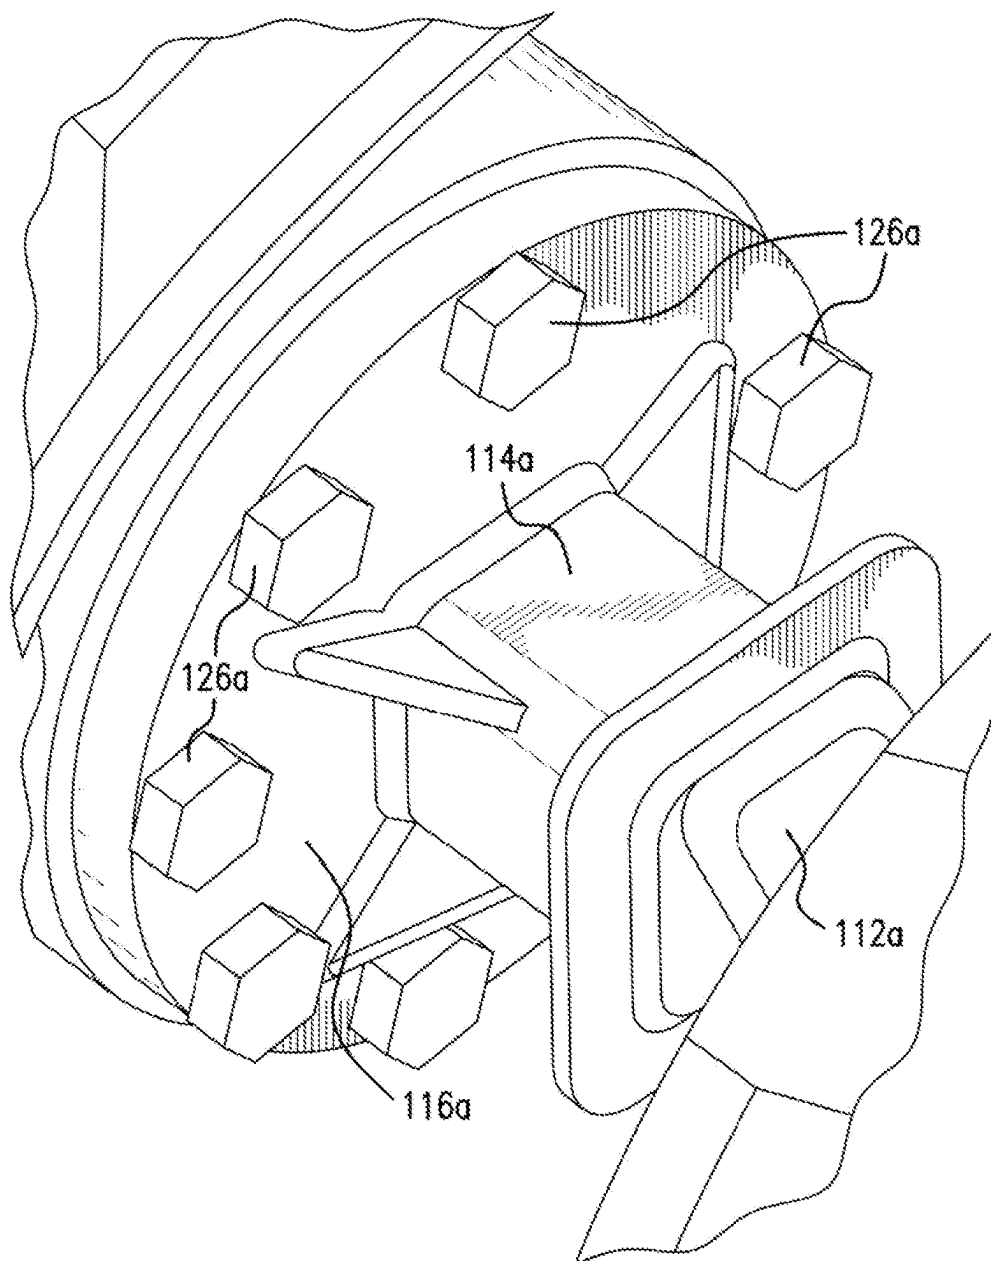


FIG. 6

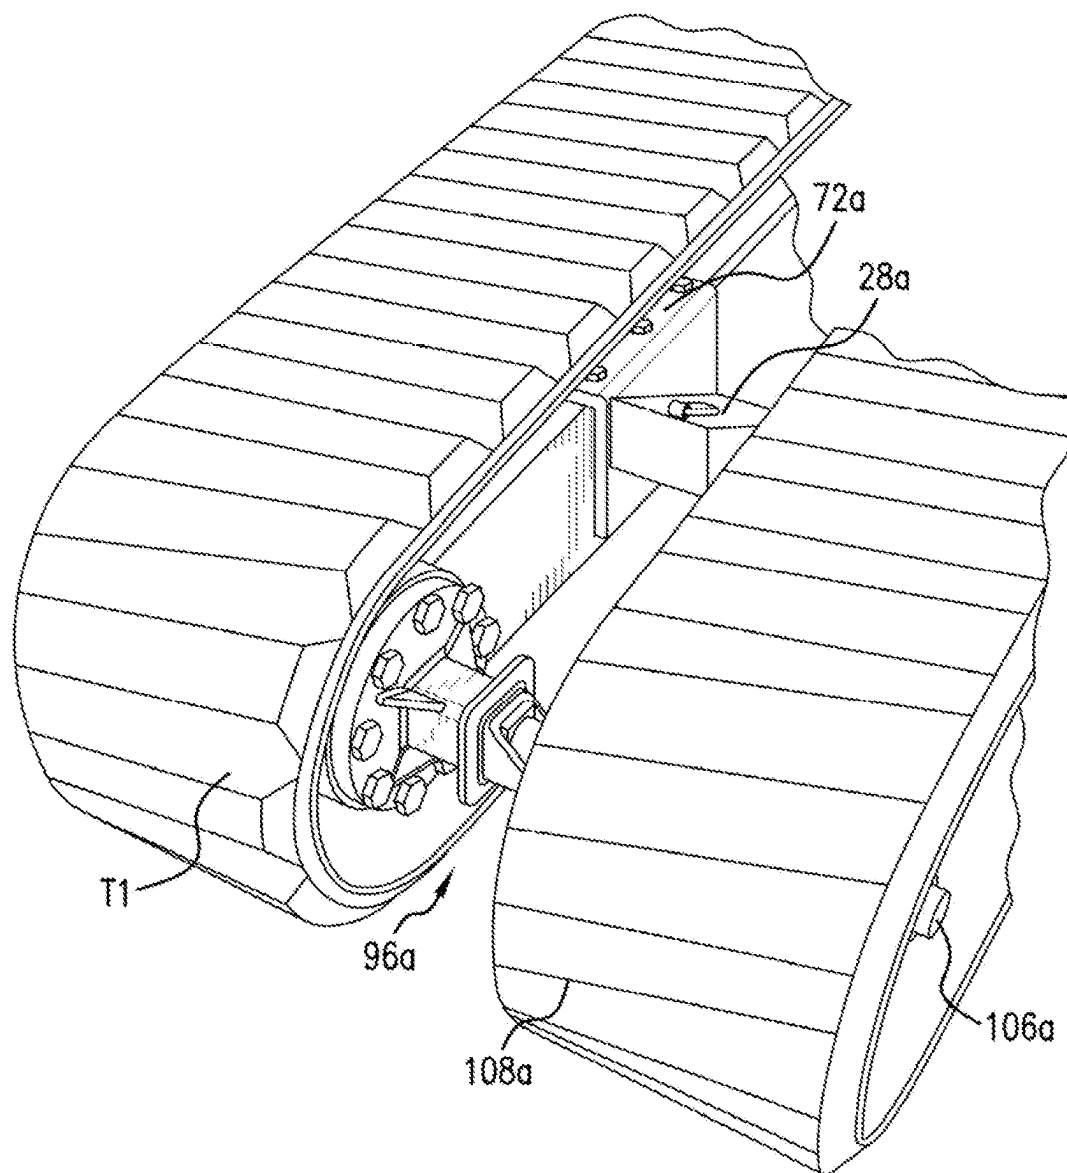


FIG. 7

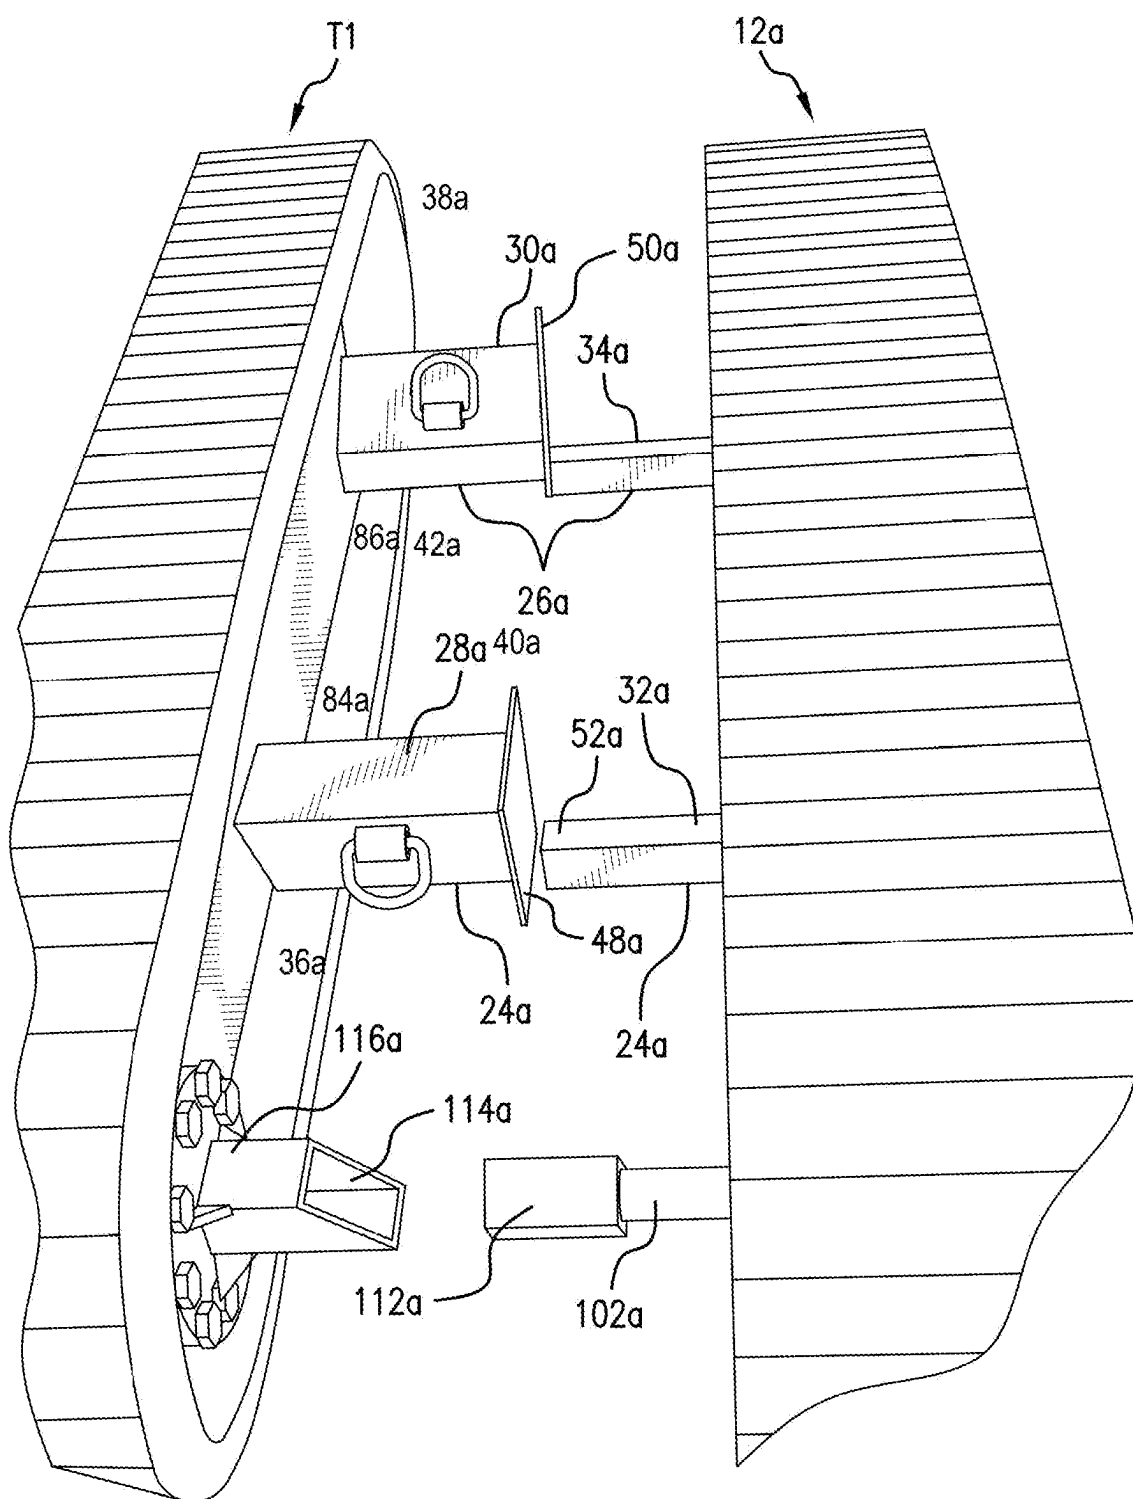


FIG. 8

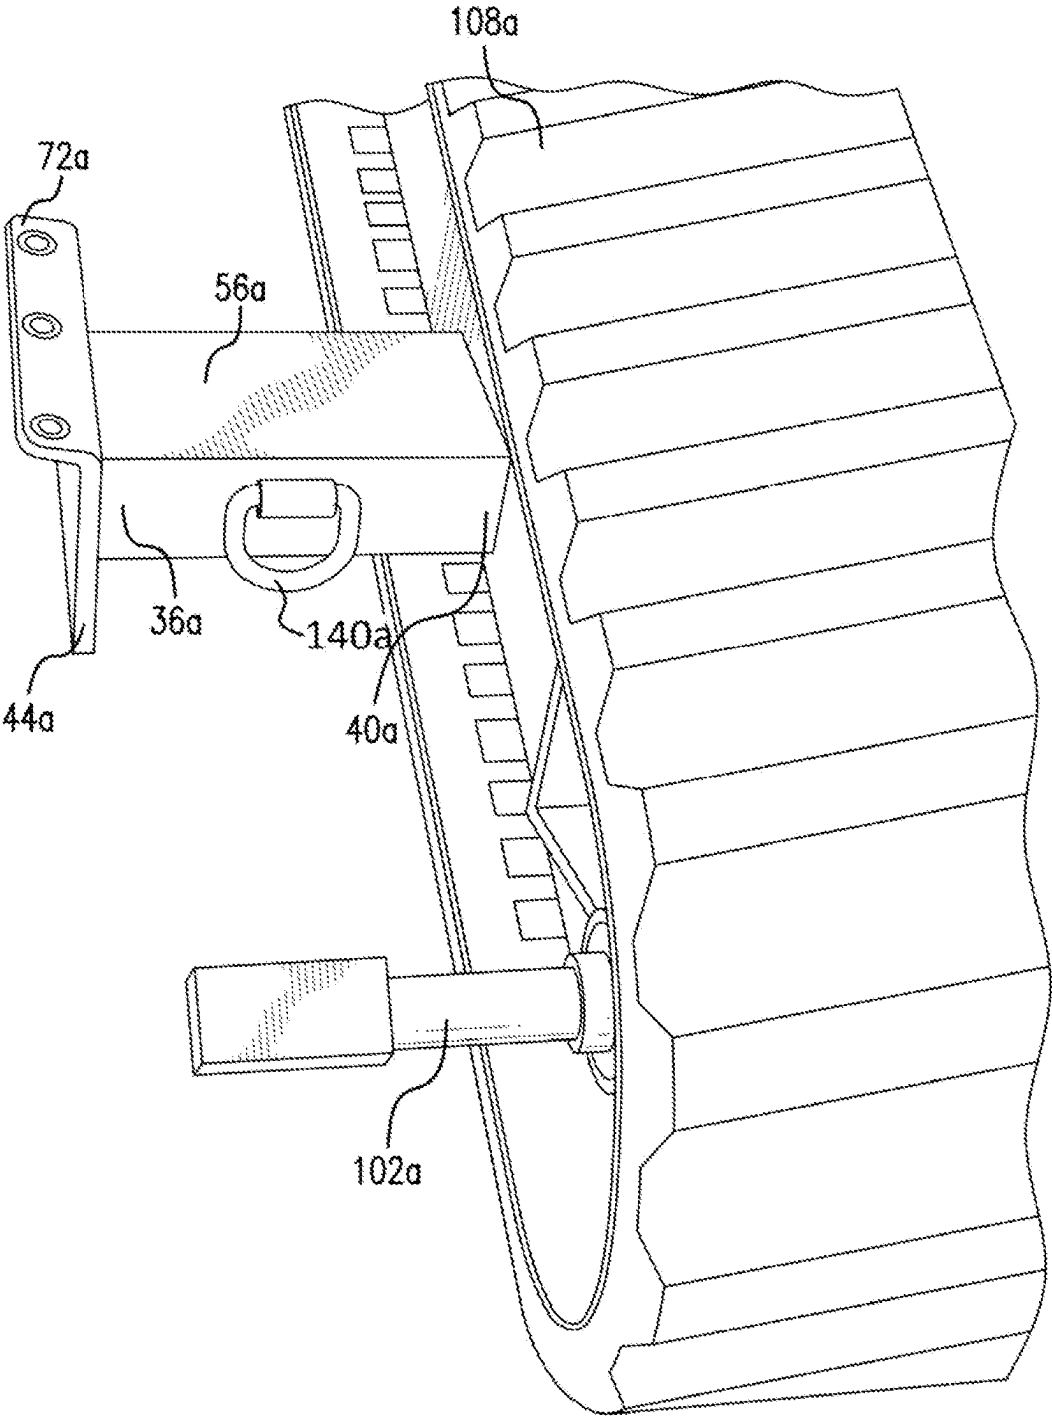


FIG. 9

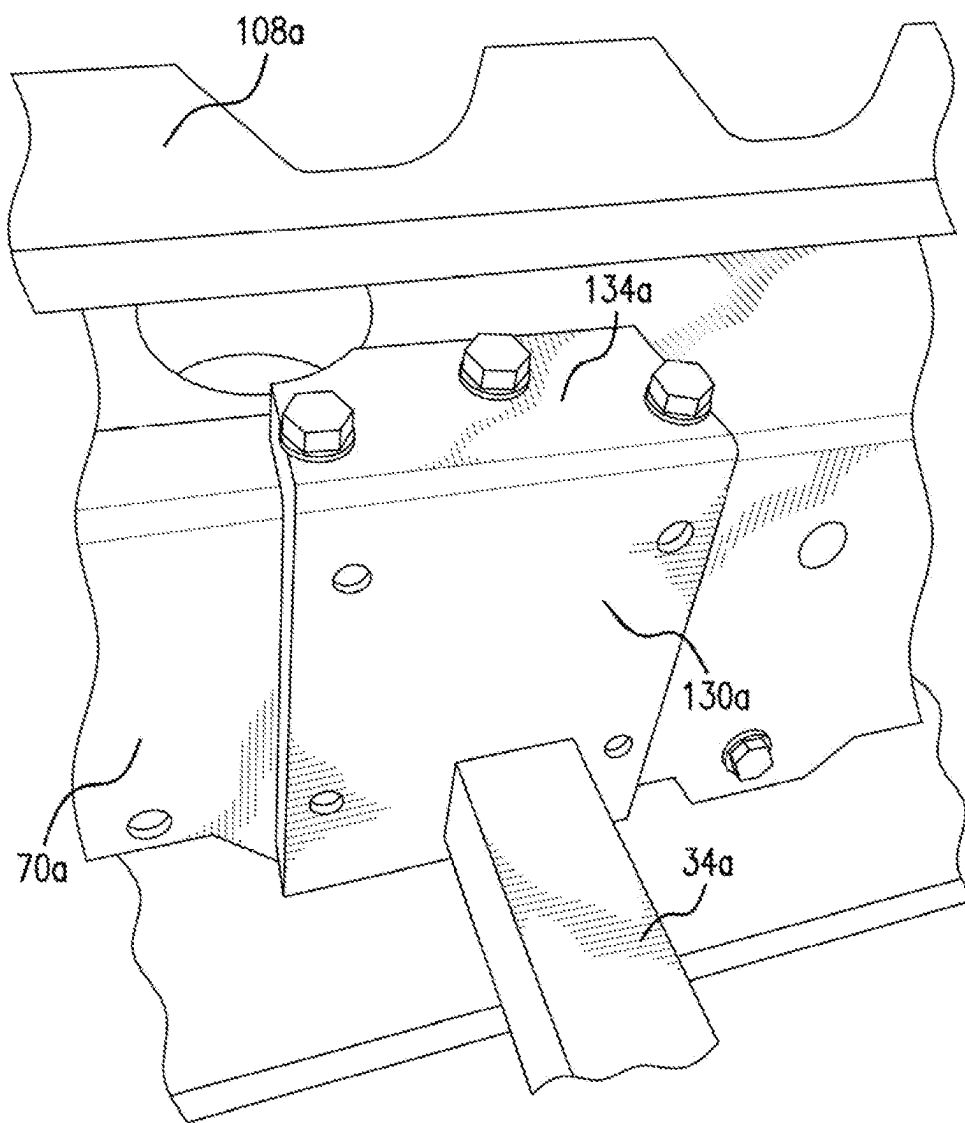


FIG. 10

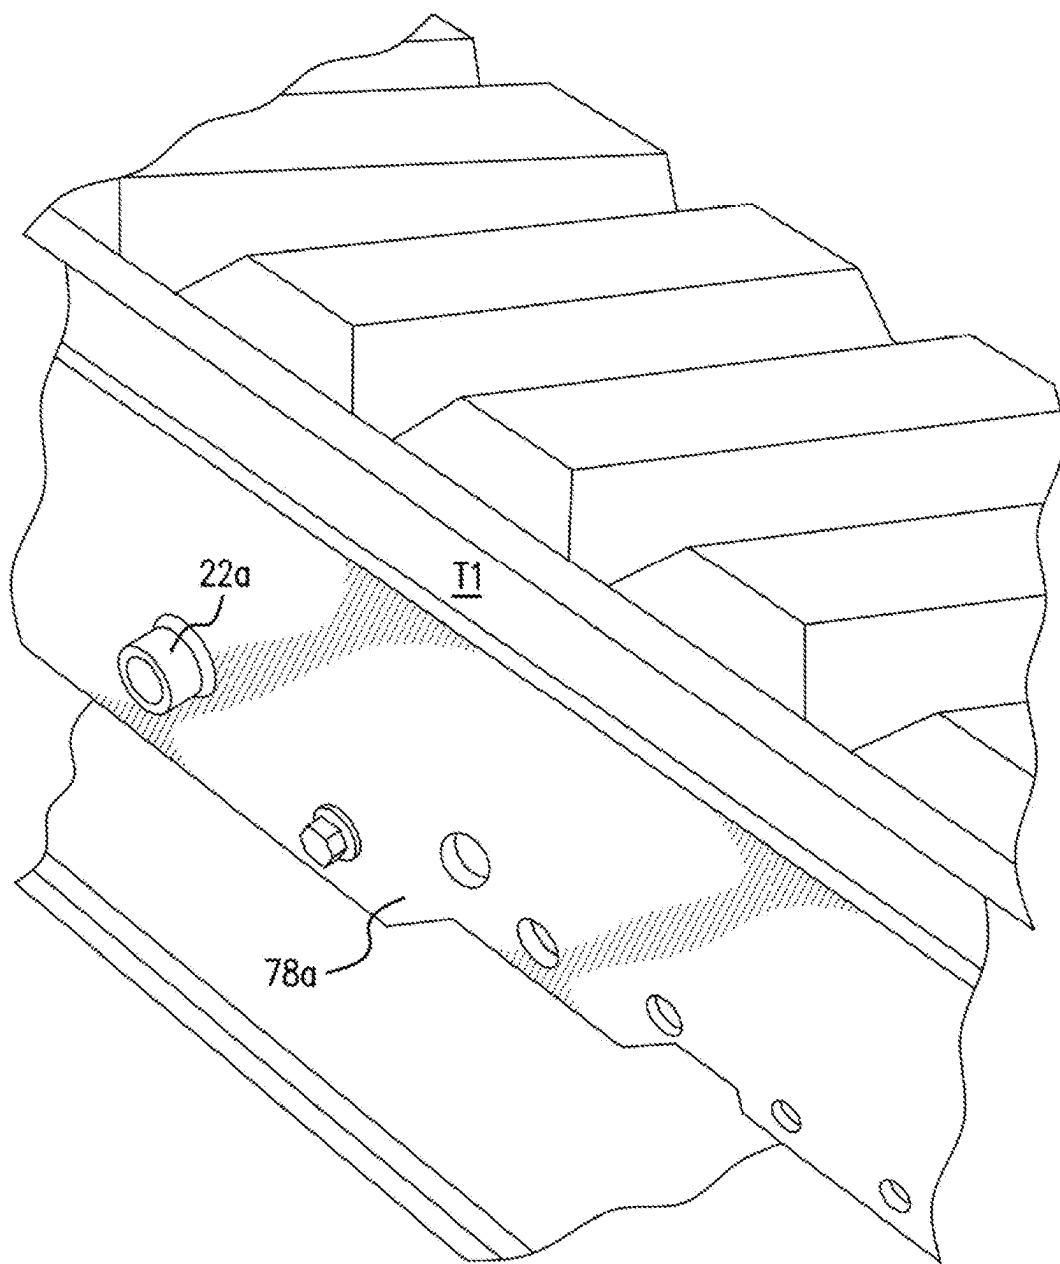


FIG. 11

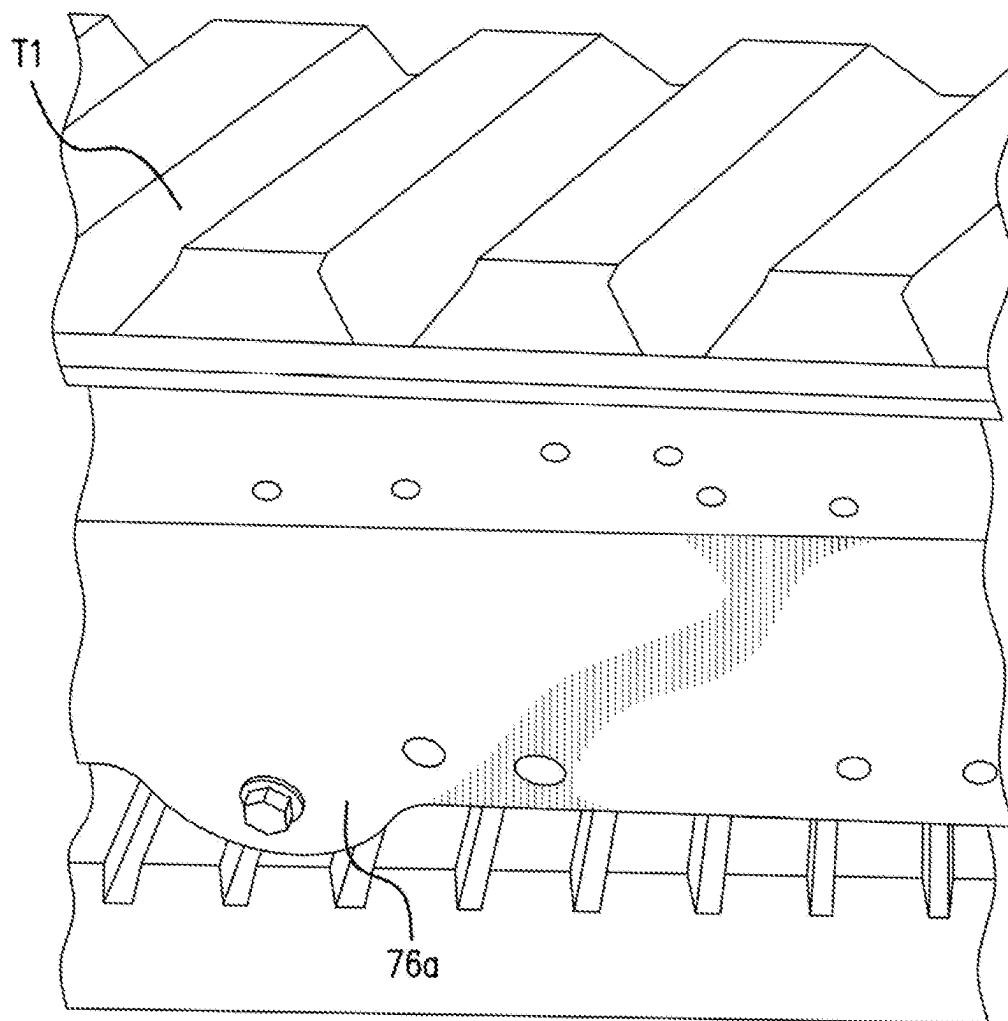


FIG. 12

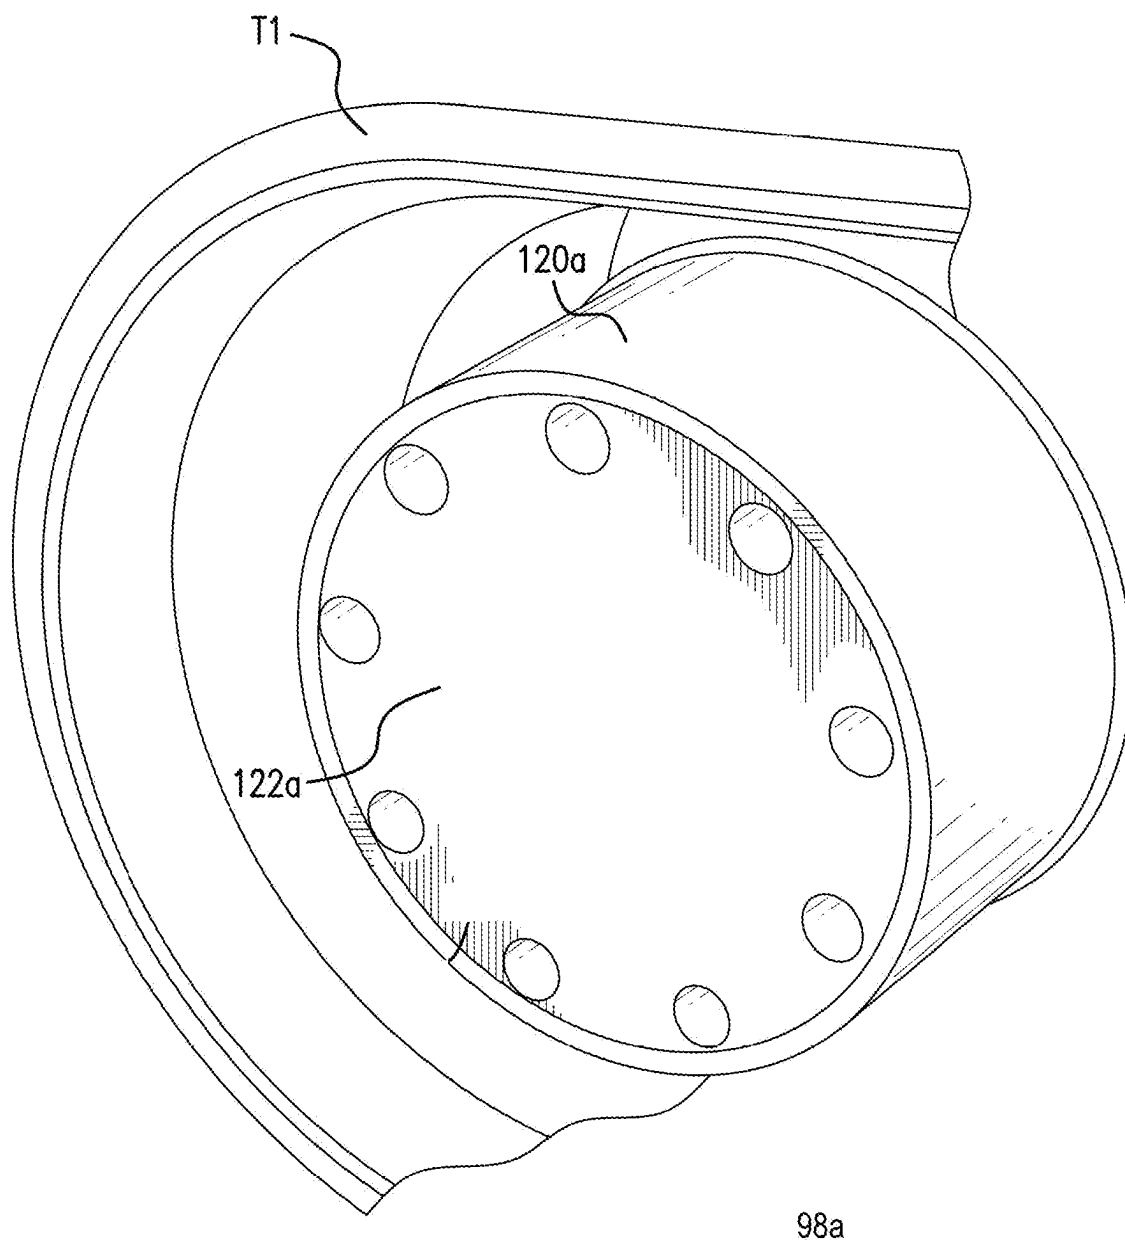


FIG. 13

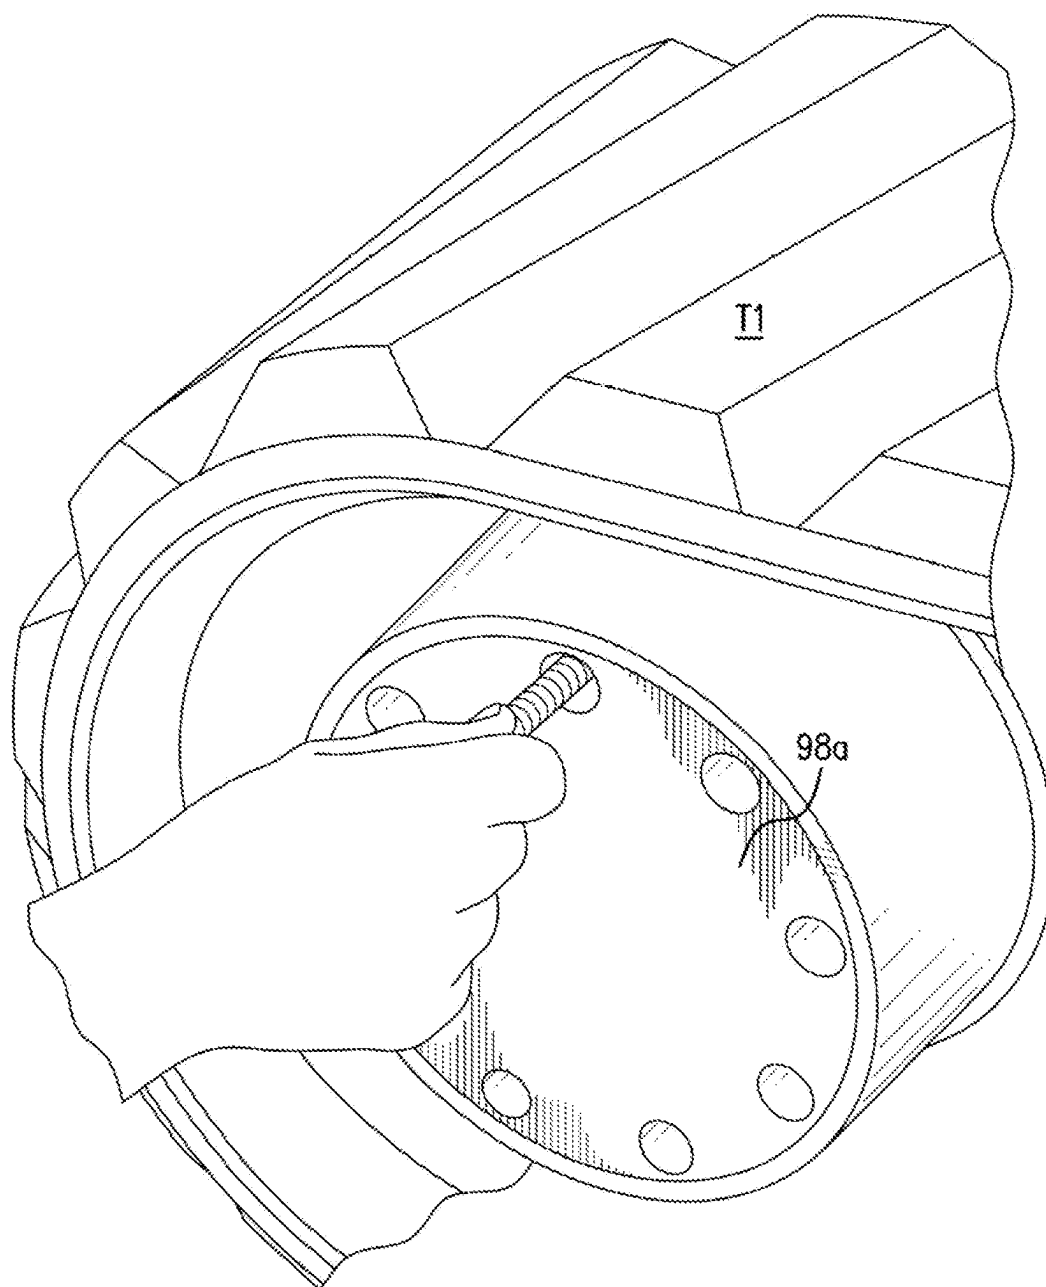


FIG.14

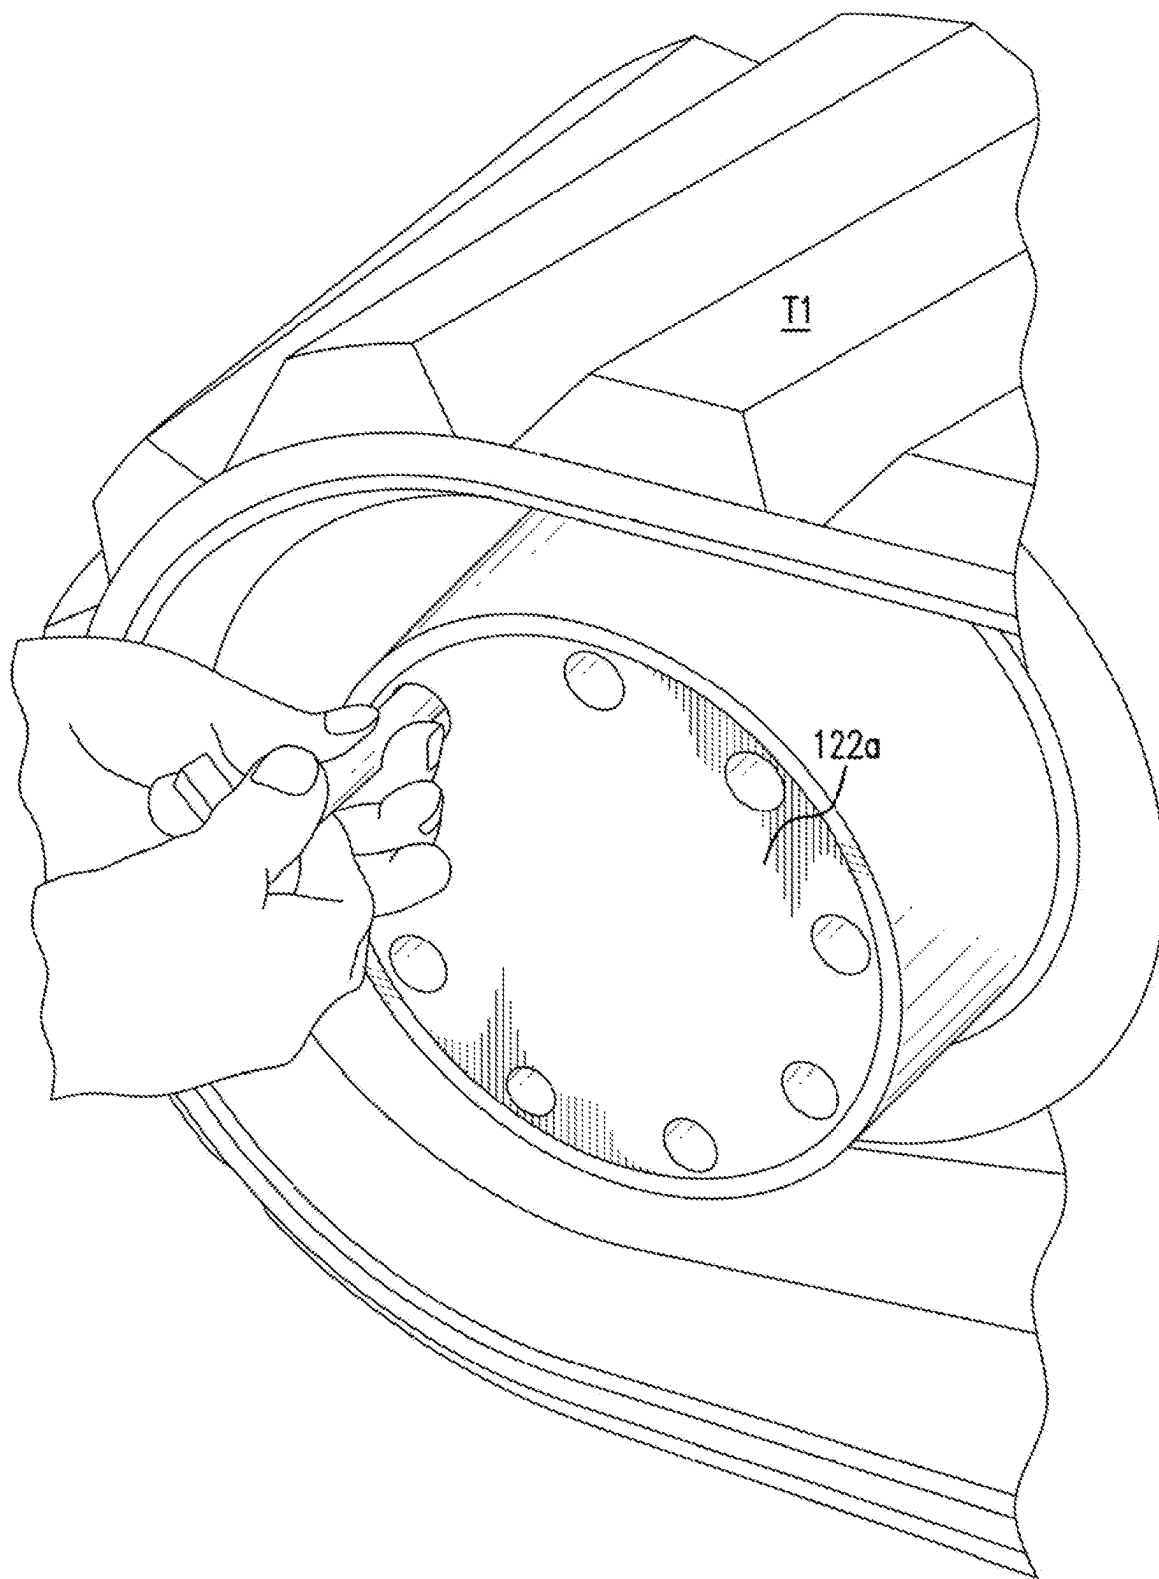


FIG. 15

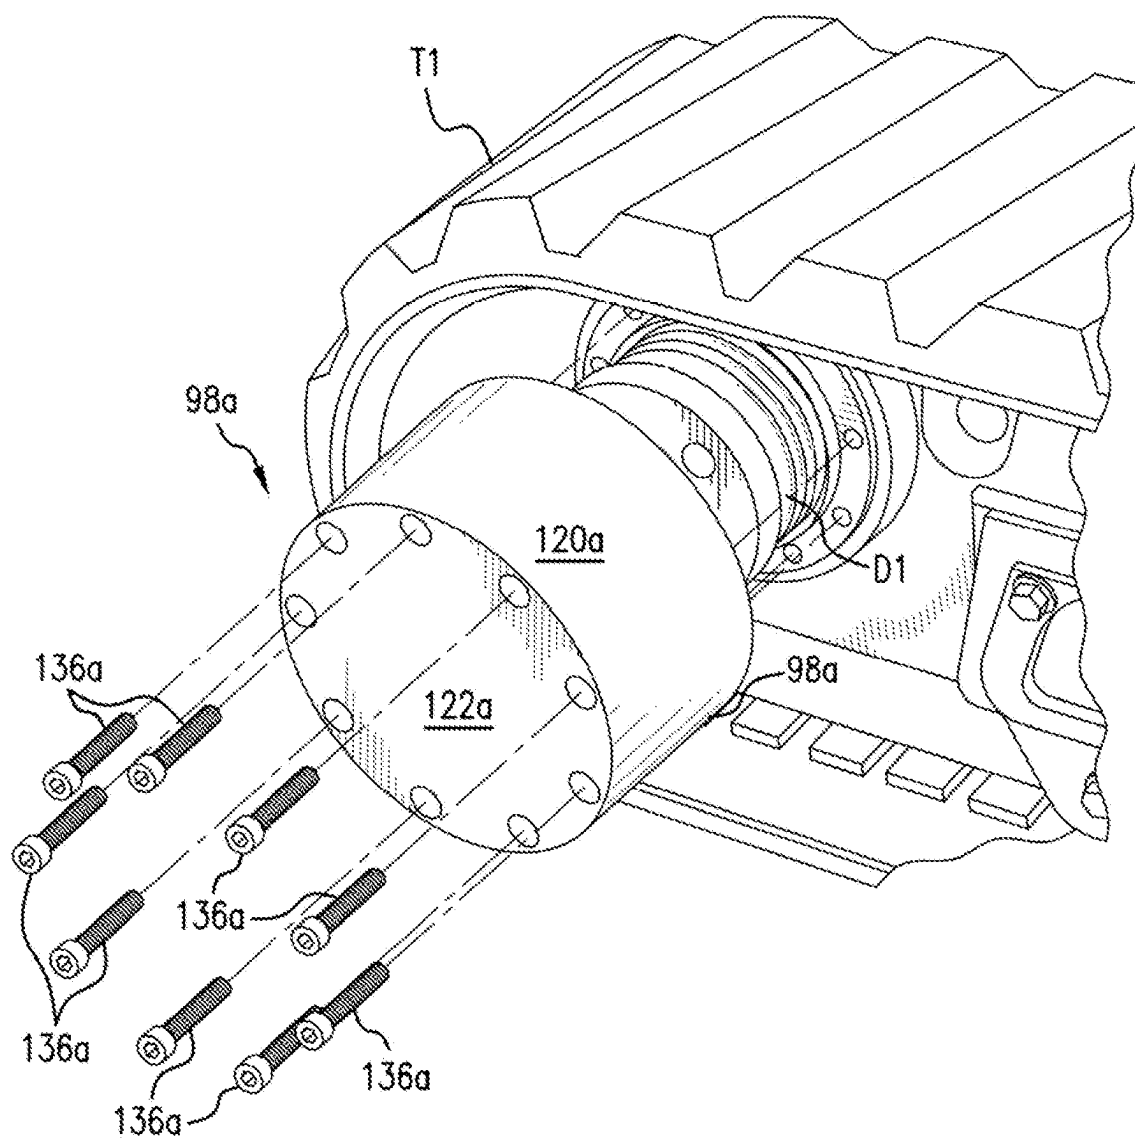


FIG. 16

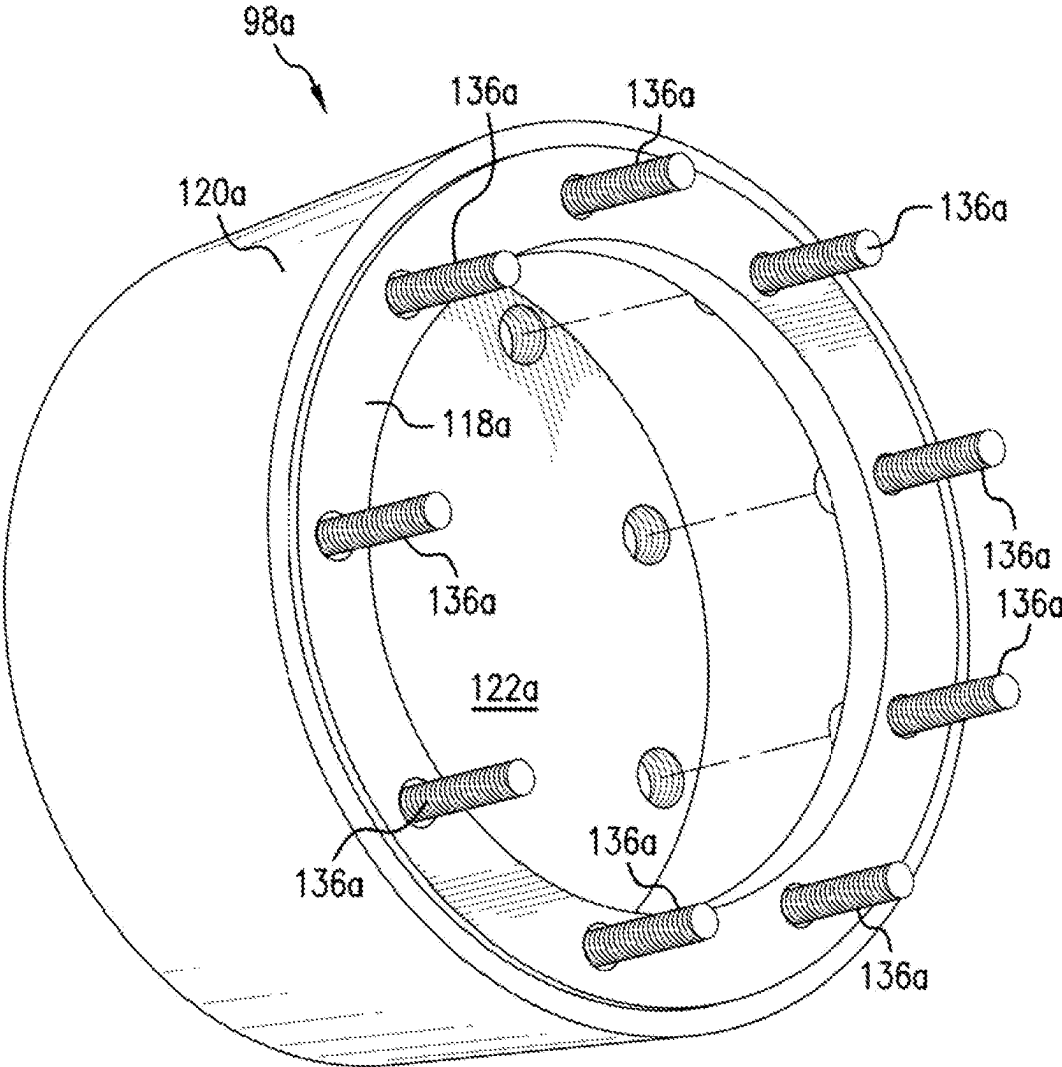


FIG.17

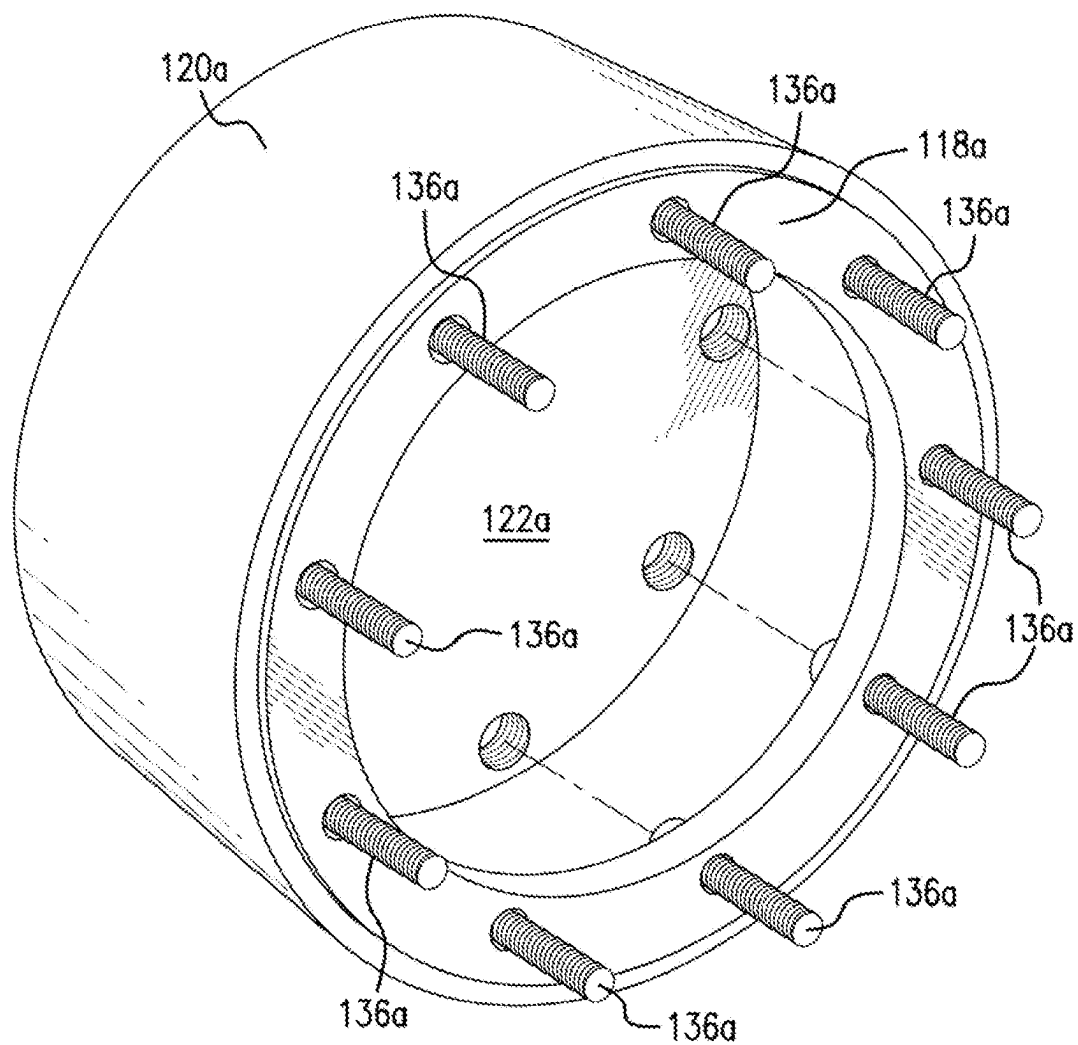


FIG. 18

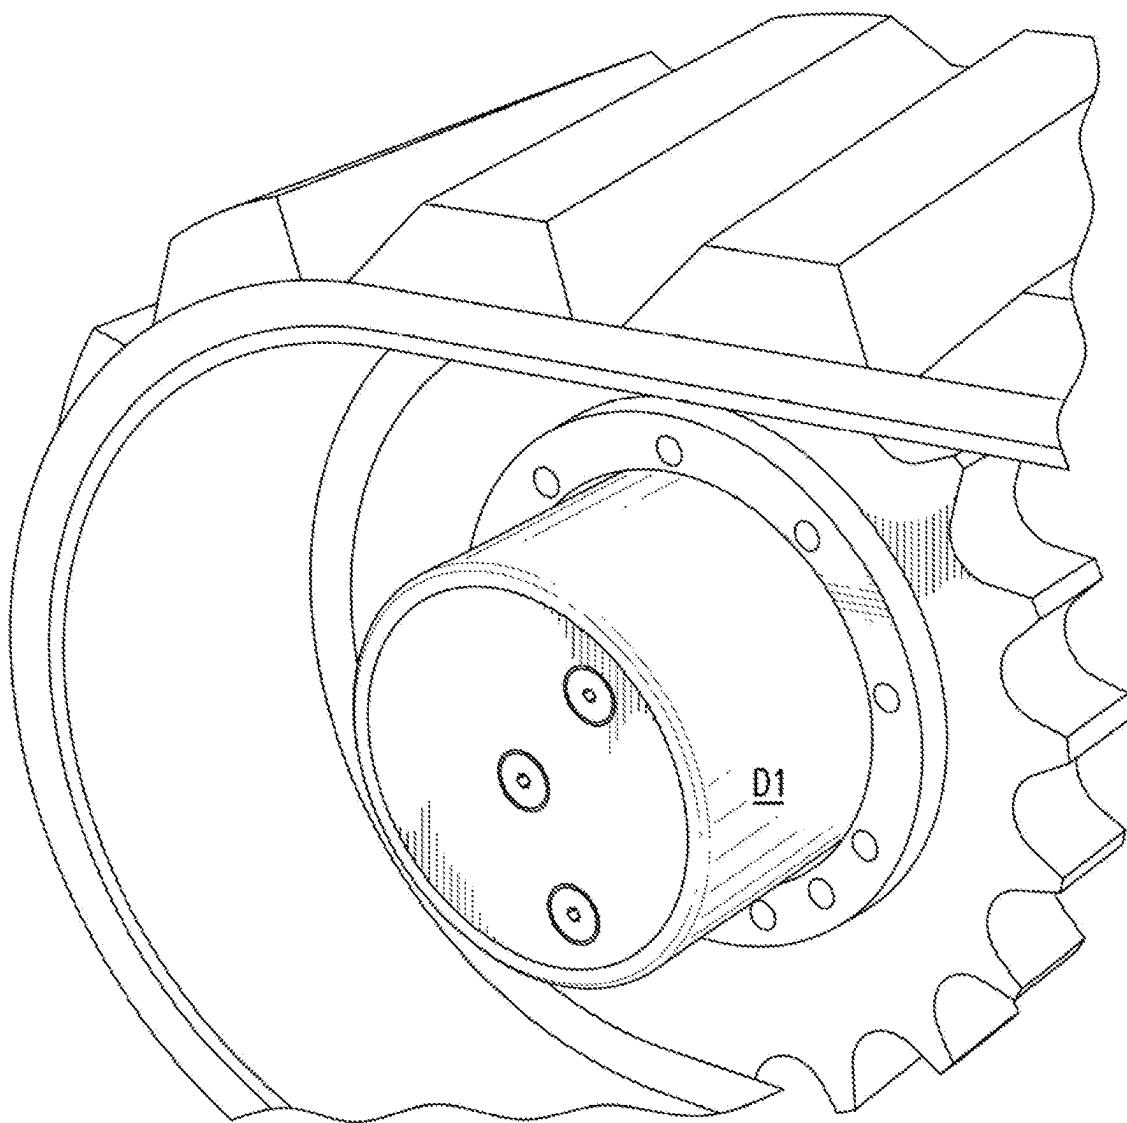


FIG. 19

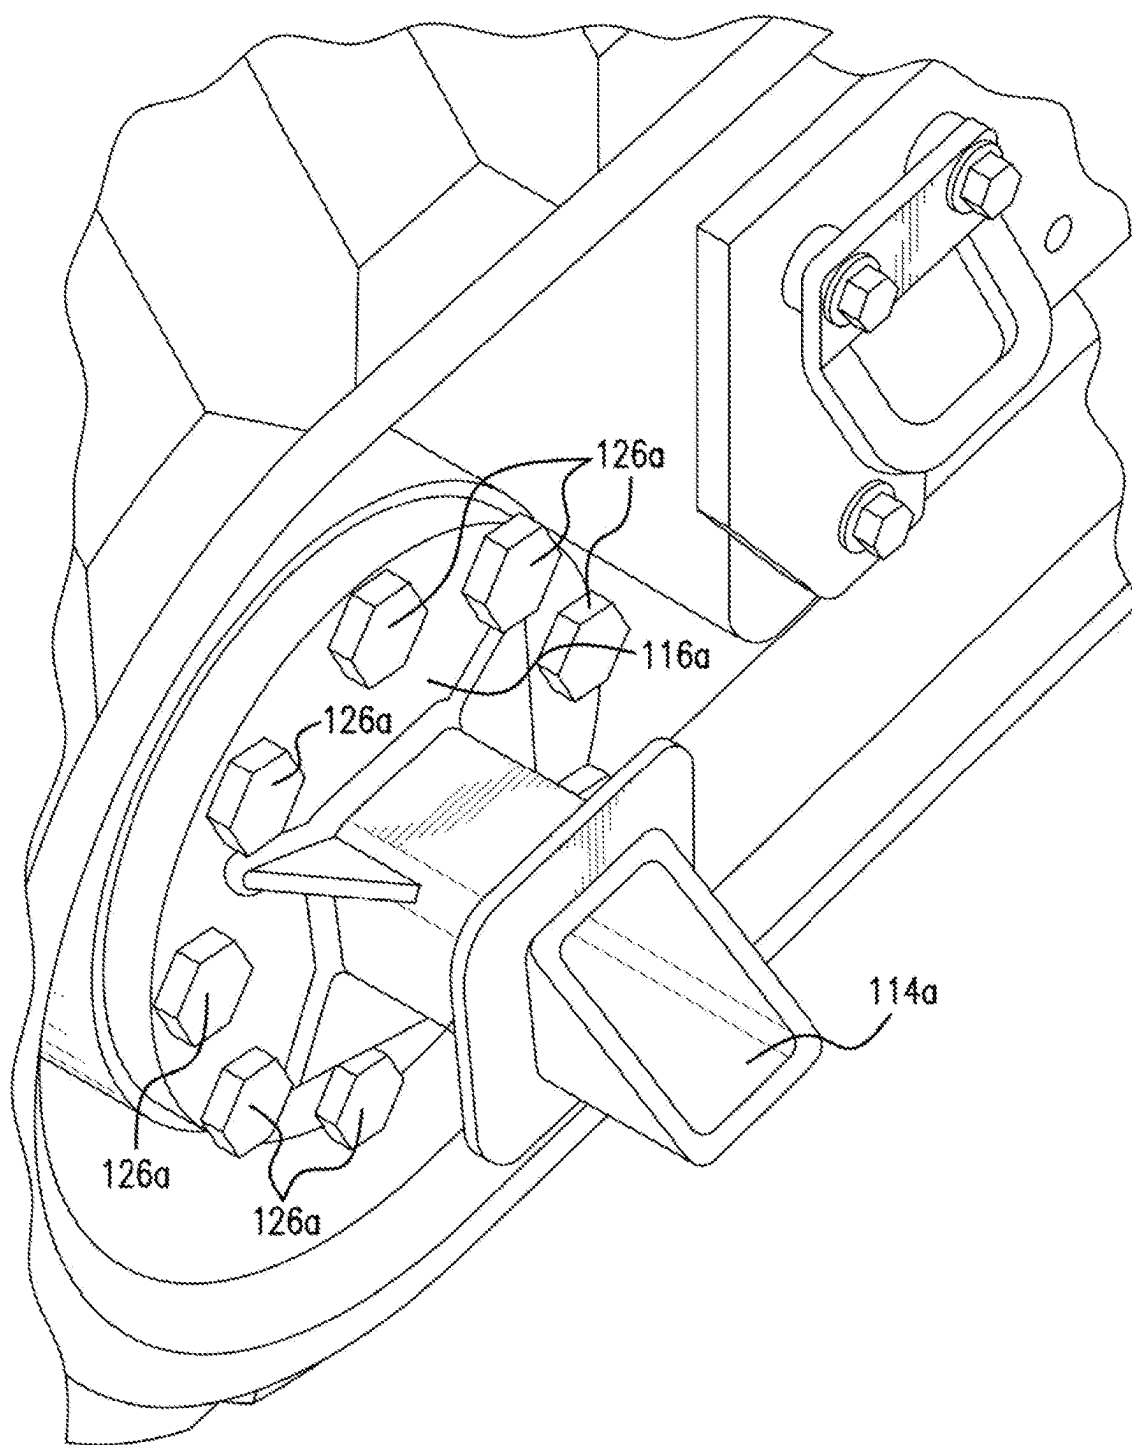


FIG. 20

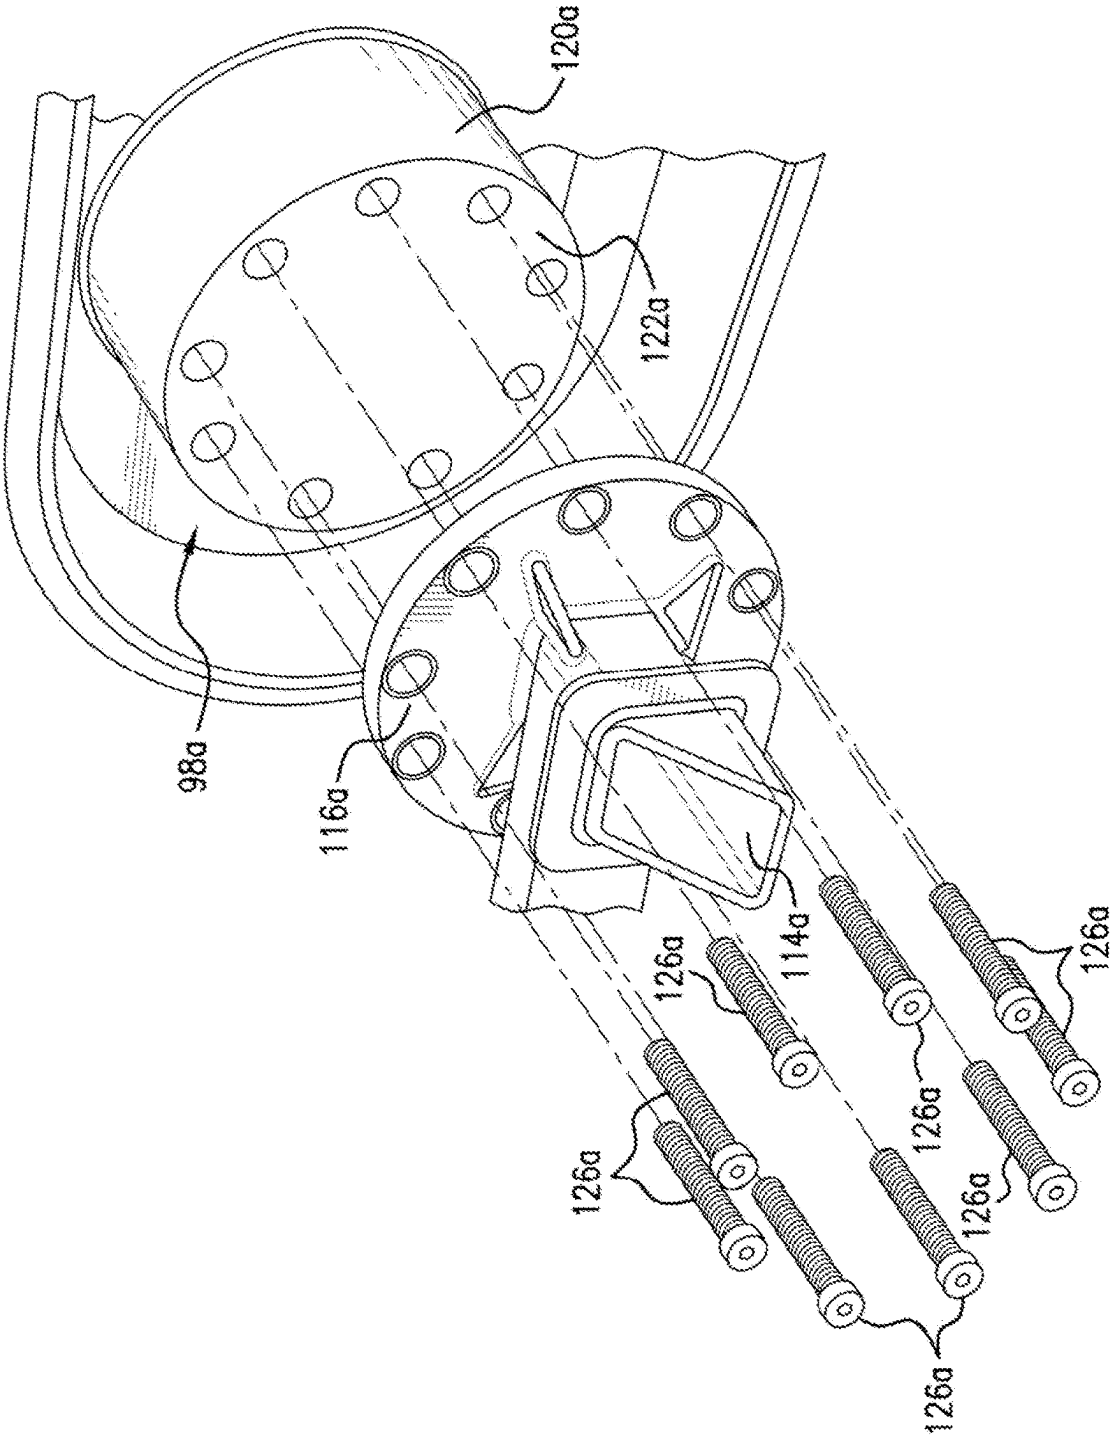


FIG. 21

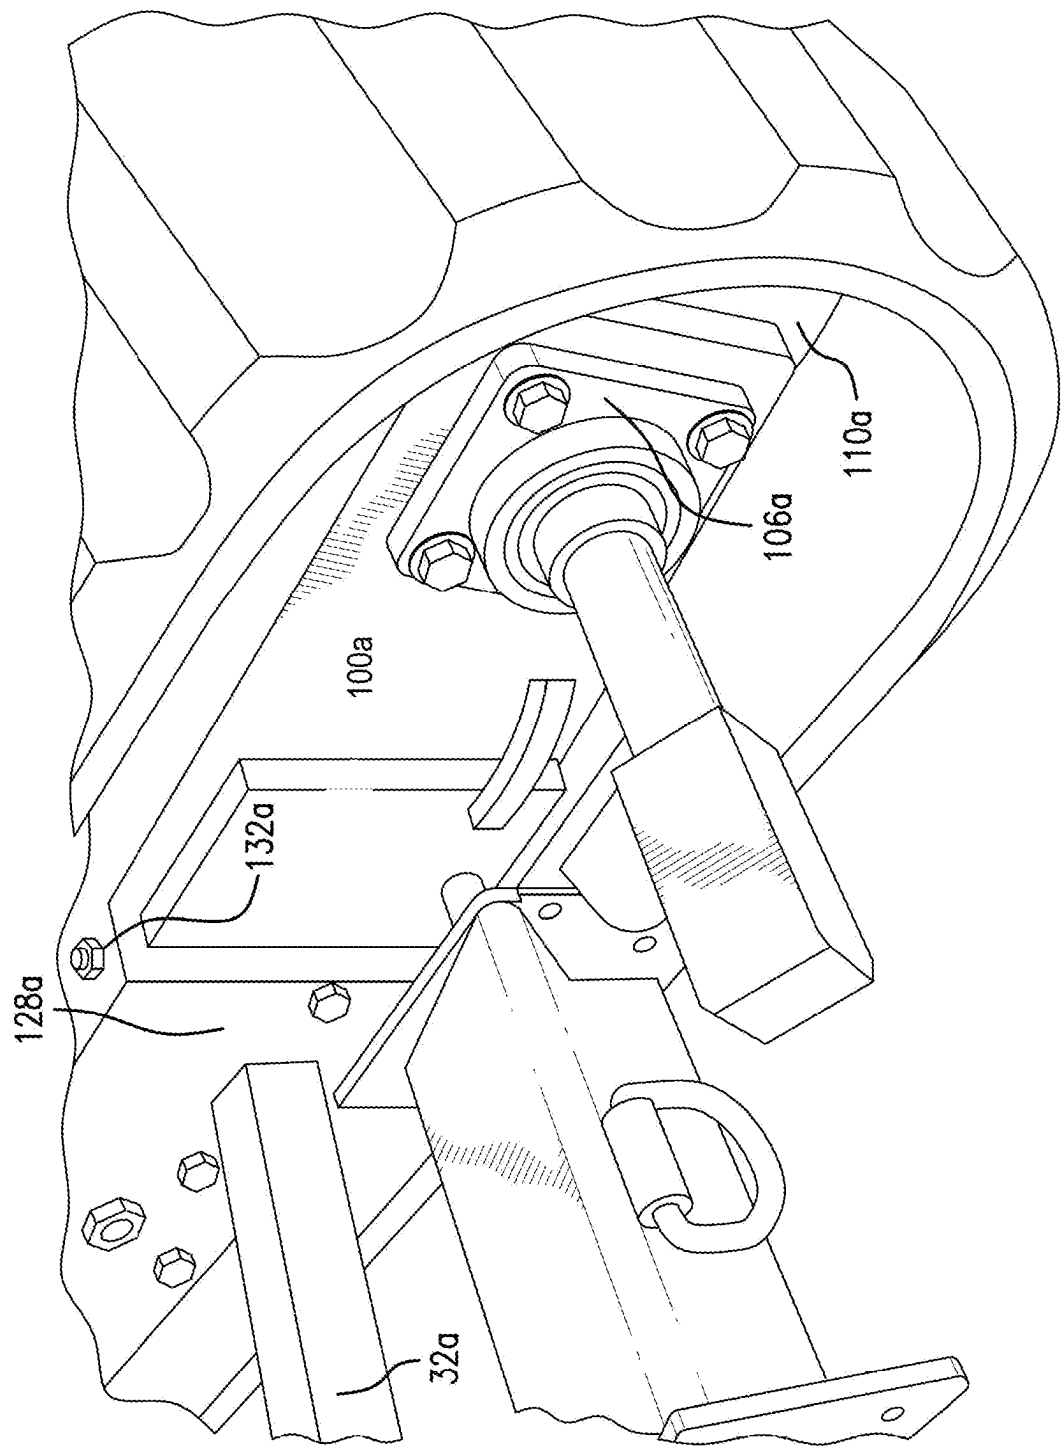


FIG. 22

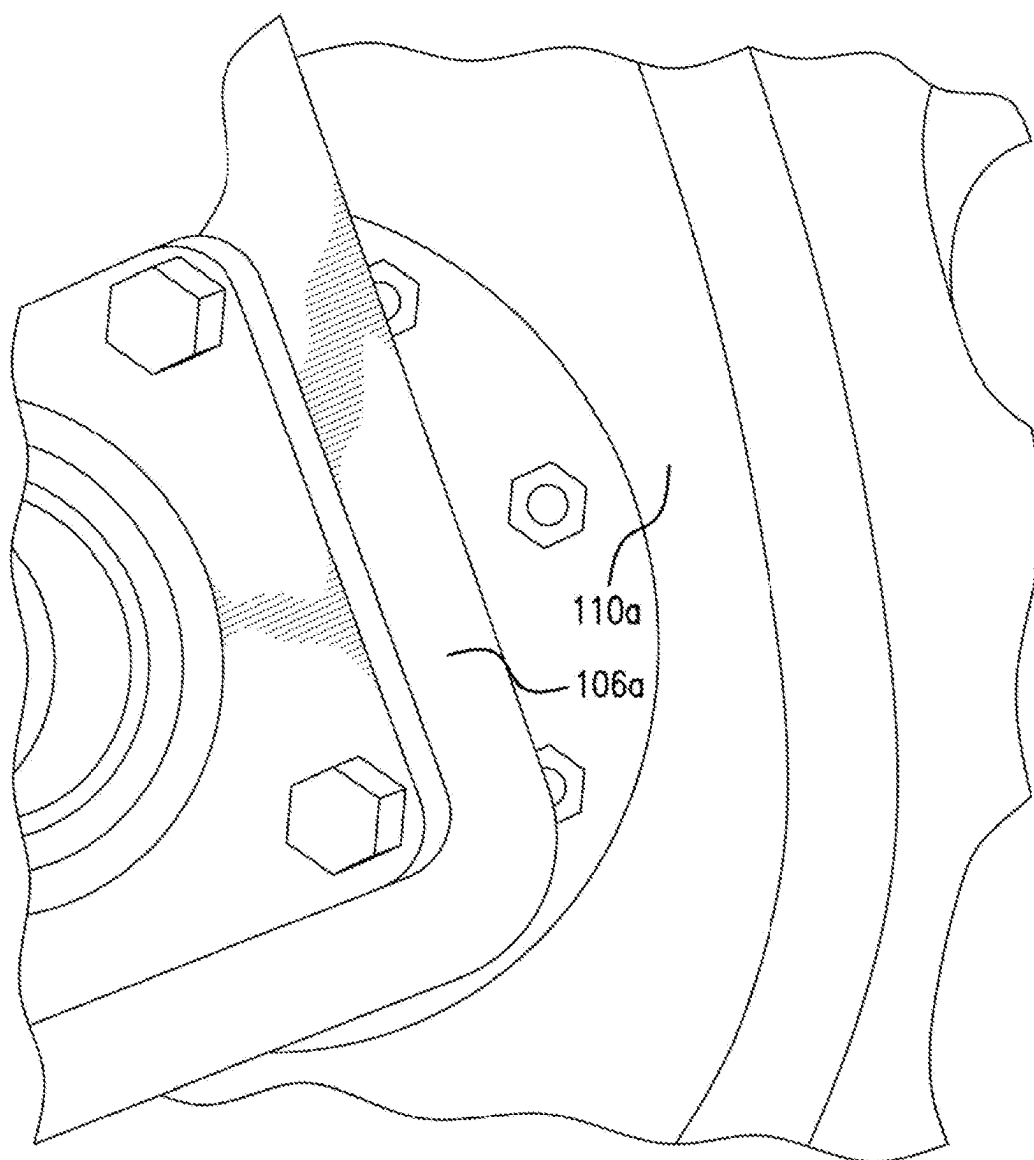


FIG. 23

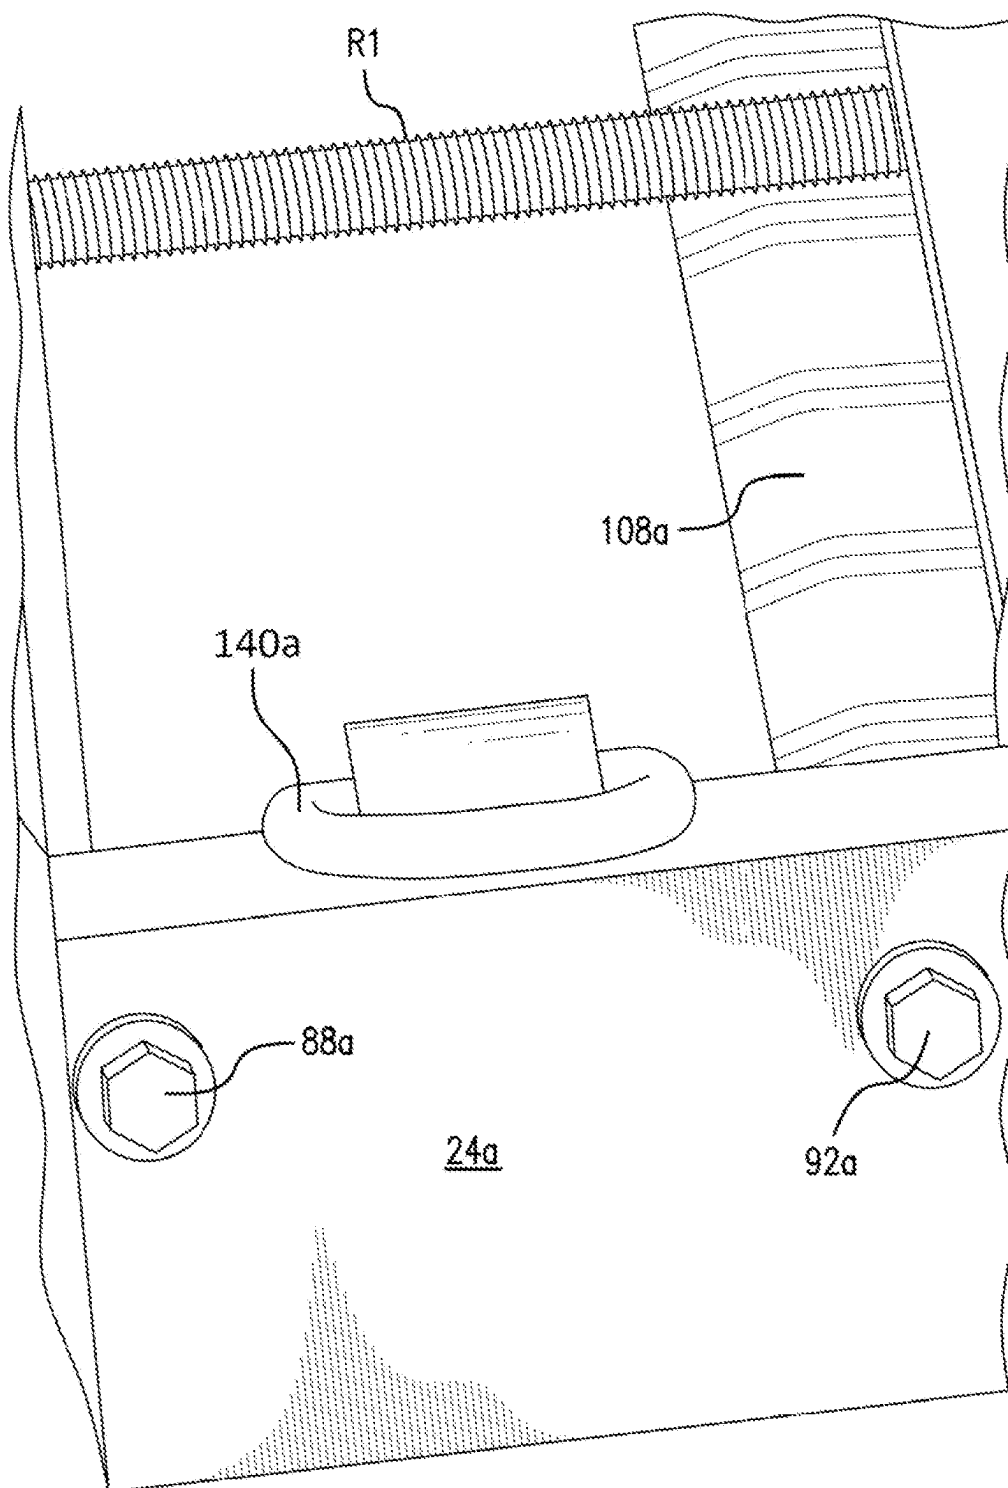


FIG. 24

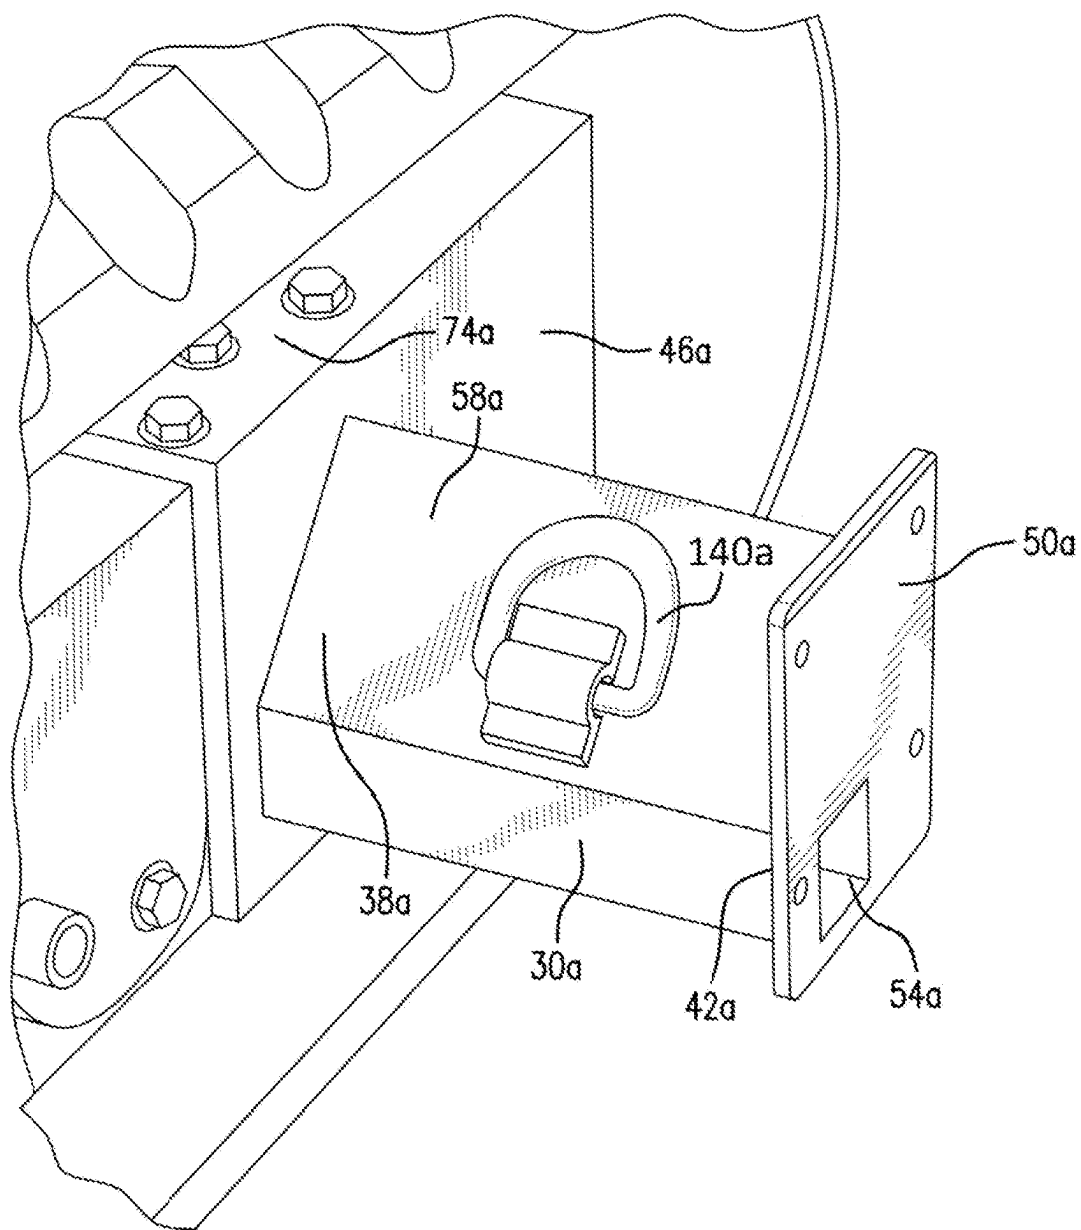


FIG. 25

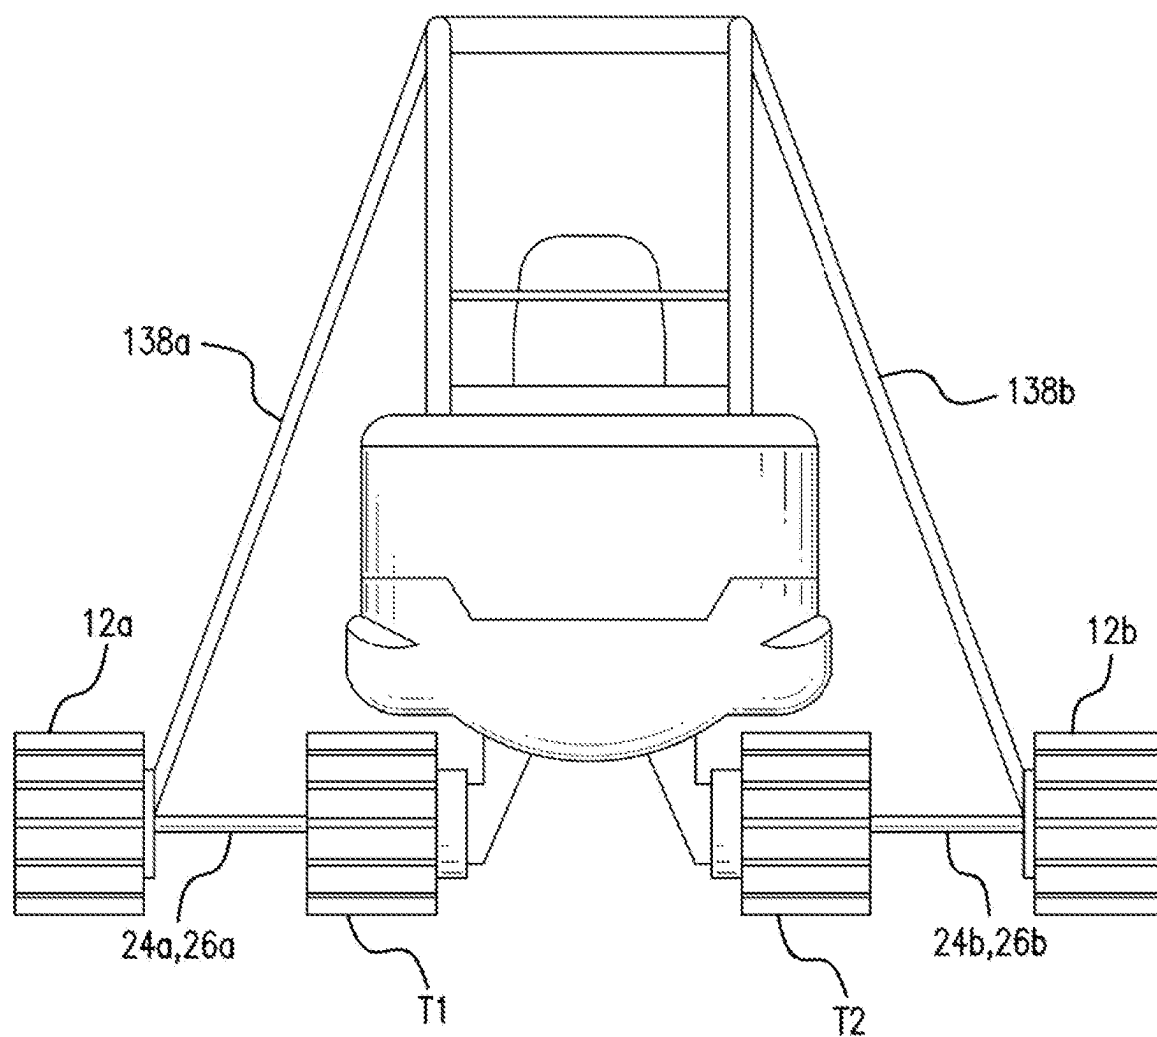


FIG. 26

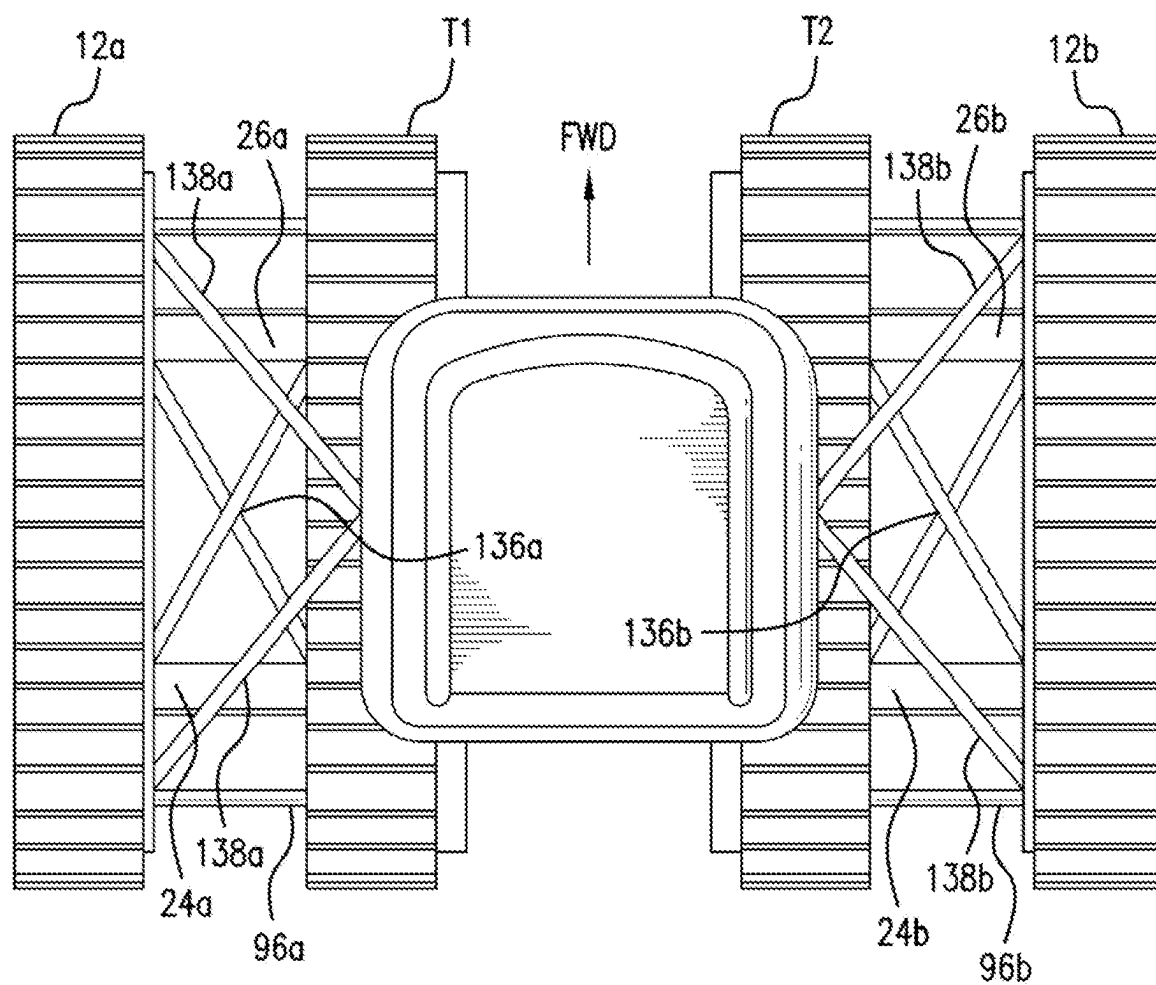


FIG. 27

REMOVABLE UNIVERSAL LATERAL TRACK EXTENSION SYSTEM

CLAIM OF PRIORITY

[0001] This application is a continuation of, and claims priority to, co-pending U.S. patent application Ser. No. 18/011,756 filed on Dec. 20, 2022. Application Ser. No. 18/011,756 is a 35 U.S.C. 371(c) National Stage application of, and claims priority to, PCT Application Serial Number PCT/US2021/040216 filed Jul. 1, 2021, which claims priority to U.S. Provisional Patent Application Ser. No. 63/047,202 filed Jul. 1, 2020. The disclosures of the preceding applications are incorporated by reference into this application.

FIELD OF THE INVENTION

[0002] The present invention relates to universal removable lateral track extenders for temporarily increasing the tracked surface area of tracked equipment.

BACKGROUND

[0003] Farm and construction equipment frequently use continuous tracks (often referred to as “caterpillar-style” tracks) to reduce ground pressure and provide improved traction, with a single track on each lateral side of the equipment (referred to as a two-track system). In many cases, however, even the reduced ground pressure of such two-track systems is not sufficient to ensure adequate stability and/or avoid excessive environmental damage in sensitive wetlands and riparian areas. In addition, a standard two-track system for a given weight-class of equipment is often not wide enough to laterally span typical irrigation channels and drainage ditches in order to perform efficient operations along the length of such obstacles (for example, rapid dredging of silted channels).

[0004] Hydraulic track width adjustment systems have been used, but generally these systems only allow an operator to pull the two tracks closer together in order to onload/offload the tracked vehicle from a standard carrier, or to maneuver between obstacles. Such systems do not actually reduce ground pressure nor improve lateral stability for the tracked equipment when operating in the field.

[0005] Some equipment provide extended tracks to replace the standard tracks, which are longitudinally extended. These may reduce overall ground pressure, but do not substantially improve lateral stability. Elongated tracks require replacement of the original tracks, drive gears and suspension—i.e. the entire track system—which is expensive. Additionally, longer track systems reduce the maneuverability of the equipment, and in some cases may actually reduce lateral stability due to the increased length-to-width ratio of the equipment when spanning over obstacles and uneven ground.

[0006] It is also known to either replace the original drive sprocket and track rollers with wider sets, or to add a second set of track rollers to a track system, and then replace the original track with a wider track which covers the wider track roller set. The wider tracks do reduce ground pressure, and provide marginal improvements in lateral stability, but have several drawbacks. For example, this type of system requires elevating the equipment, removing the original track, replacing the original track rollers and drive sprocket (or addition of a second set of track rollers), and re-tracking

the equipment—which then requires re-tensioning the tracks and potentially adjustments to the drive system. Such systems require separate tracks—because the wider (and therefore more expensive and less widely available) tracks and track rollers and drive sprockets are not compatible with the original single-track system. Removing the wider tracks and track rollers entails the same cumbersome replacement and readjustment procedure, rendering the modifications essentially permanent. In addition to the difficulties entailed in such changeouts, the improvement in lateral stability is small, as the lateral track center-of-pressure is expanded only by the width of a single track roller. The marginal increase in lateral track separation does not substantially improve the ability to laterally span irrigation channels and drainage ditches. In addition, as the wider track spans the track rollers, there is no ability to provide lateral bracing to the wider track system reduce strain on the suspension.

[0007] Pontoon attachments have been created as well, to provide floatation in wetlands and near-shore applications, but pontoons are only useful to provide buoyancy in water. Pontoons provide no benefit in mud, nor do they provide wider span or stability when used on ground, and generally degrade operations on land, making it more difficult to perform operations transiting between shallow water and adjacent land areas.

[0008] In addition to floatation and lateral span limitations, standard tracked equipment, especially in smaller weight/size classes, have limited lateral stability. The ability to extend a given equipment’s lateral footprint would greatly increase its stability when operating on sloped surfaces and when picking lateral loads.

[0009] Thus, there is a need for an apparatus for continuous track equipment that: (1) reduces ground pressure; (2) improves lateral stability for operation in soft ground, hill-sides and/or for picking lateral loads; (3) increases lateral track separation to span channels and ditches; (4) is easily installed and removed so as to not interfere with normal operation of the equipment; (5) utilizes standard-size tracks and track rollers for the equipment class; and (6) is universally adaptable for equipment using the same track sizes.

SUMMARY AND ADVANTAGES

[0010] A universal removable lateral track extension system includes an extension track assembly removably couplable outboard of an original lateral track at a selected displacement width, the assembly further including a track frame plate, first and second receiver hitches, a drive coupler removably couplable to the corresponding drive sprocket of the tracked equipment, the drive coupler including a drive bearing assembly and connected drive sprocket in line with the extension track track rollers, a drive sprocket coupler and extension axle removably couplable from the drive sprocket connector to the drive bearing assembly, and a continuous track extending around the extension track track rollers and drive coupler.

[0011] The system described and claimed herein presents numerous advantages over existing apparatus and methods. The track extensions double the track surface area in contact with the ground—under normal circumstances—so reduce ground pressure by 50%. The track extensions increase lateral stability, both by reducing ground pressure (thus reducing risk of one side sinking in soft ground) and by increasing the effective track width, which increases the righting arm and moment of inertia of the vehicle—espe-

cially important when imposing side loads on the vehicle or working on inclined surfaces. The track extensions permit the vehicle to span wider channels and ditches, allowing much improved efficiency for operations such as dredging irrigation channels and digging irrigation and drainage channels. The track extensions are easily installed and removed so as to not interfere with normal operation of the equipment. The system utilizes standard-size tracks and track rollers for the equipment class, using continuous tracks and track rollers of the same dimensions as the equipment. The system is universally adaptable for equipment using the same track sizes—for retrofitting or OEM equipment pre-configured to receive removable extension tracks.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The accompanying drawings, which are incorporated into and constitute a part of this specification, illustrate one or more embodiments of the present invention and, together with the detailed description, serve to explain the principles and implementations of the invention.

[0013] FIG. 1 shows a partial port side aft view of a first embodiment.

[0014] FIG. 2 shows a partial port side aft view of a first embodiment.

[0015] FIG. 3 shows a port side view of a first embodiment.

[0016] FIG. 4 shows a port side aft view of a first embodiment.

[0017] FIG. 5 shows a close-up view of a receiver hitch of a first embodiment.

[0018] FIG. 6 shows a close-up view of a drive coupler of a first embodiment.

[0019] FIG. 7 shows a partial front port side view of a first embodiment, including a drive coupler.

[0020] FIG. 8 shows a port extension track assembly of a first embodiment, disconnected from the equipment.

[0021] FIG. 9 shows a front inside side view of a port extension track assembly.

[0022] FIG. 10 shows a close-up view of a male portion of a receiver hitch.

[0023] FIG. 11 shows an original track extension plate of a first embodiment.

[0024] FIG. 12 shows an original track extension plate of a first embodiment.

[0025] FIG. 13 shows a close-up view of a drive coupler hub cover of a first embodiment.

[0026] FIG. 14 shows a close-up view of a drive coupler hub cover of a first embodiment being disassembled.

[0027] FIG. 15 shows a close-up view of a drive coupler hub cover of a first embodiment being disassembled.

[0028] FIG. 16 shows a partially-exploded view of a drive coupler hub cover of a first embodiment.

[0029] FIG. 17 shows an interior view of a drive coupler hub cover with connector bolts.

[0030] FIG. 18 shows an interior view of a drive coupler hub cover with connector bolts.

[0031] FIG. 19 shows a close-up view of an original track drive sprocket assembly.

[0032] FIG. 20 shows a view of the drive coupler torque plate and extension axle receiver of a first embodiment.

[0033] FIG. 21 shows a partially exploded view of a drive coupler torque plate assembly of a first embodiment.

[0034] FIG. 22 shows a drive bearing assembly of an extension track assembly of a first embodiment.

[0035] FIG. 23 shows a drive bearing assembly of an extension track assembly of a first embodiment.

[0036] FIG. 24 shows an overhead view of a receiver hitch and D-ring of a first embodiment, with a pusher/disassembly bolt visible during disassembly of a first embodiment.

[0037] FIG. 25 shows a close-up view of a female portion of a port side aft receiver hitch of a partially disassembled track extension system of a first embodiment.

[0038] FIG. 26 shows a schematic view of a track extension system with horizontal stiffeners of a first embodiment.

[0039] FIG. 27 a schematic view of a track extension system with vertical stiffeners of a first embodiment.

[0040]

DRAWING REFERENCE NUMBERS

Ref. Nr. Description

10	First Described Embodiment
12a	First Extension Track Assembly
14a	First Extension Track Frame and Frame Plate
16a	First Extension Track First Threaded Alignment Channel
18a	First Extension Track Second Threaded Alignment Channel
20a	First Extension Track First Alignment Cup
22a	First Extension Track Second Alignment Cup
24a	First Extension Track First Receiver Hitch
26a	First Extension Track Second Receiver Hitch
28a	First Extension Track First Receiver Hitch Female Portion
30a	First Extension Track Second Receiver Hitch Female Portion
32a	First Extension Track First Receiver Hitch Male Portion
34a	First Extension Track Second Receiver Hitch Male Portion
36a	First Extension Track First Receiver Hitch Female Portion First End
38a	First Extension Track Second Receiver Hitch Female Portion First End
40a	First Extension Track First Receiver Hitch Female Portion Second End
42a	First Extension Track Second Receiver Hitch Female Portion Second End
44a	First Extension Track First Receiver Hitch Female Portion First Connection Flange
46a	First Extension Track Second Receiver Hitch Female Portion First Connection Flange
48a	First Extension Track First Receiver Hitch Female Portion Second Connection Flange
50a	First Extension Track Second Receiver Hitch Female Portion Second Connection Flange
52a	First Extension Track First Receiver Hitch Female Portion Receiving Aperture
54a	First Extension Track Second Receiver Hitch Female Portion Receiving Aperture
56a	First Extension Track First Receiver Hitch Female Portion Top Extension Flange Plate
58a	First Extension Track Second Receiver Hitch Female Portion Top Extension Flange Plate

-continued

DRAWING REFERENCE NUMBERS

Ref. Nr. Description

60a	First Extension Track Frame Plate First Portion
62a	First Extension Track Frame Plate Second Portion
64a	First Extension Track Rollers
66a	(not used)
68a	First Extension Track Receiver Hitch Female Portion Engagement Points
70a	First Extension Track Inboard Frame Plate
71a	First Extension Track Outboard Frame Plate
72a	First Extension Track First Receiver Hitch Female Portion First Attachment Flange Top Follower Plate
74a	First Extension Track Second Receiver Hitch Female Portion First Attachment Flange Top Follower Plate
76a	First Truss Bolt Extension Plate
78a	Second Truss Bolt Extension Plate
80a	First Truss Bolt
82a	Second Truss Bolt
84a	First Truss Bolt Receiver
86a	Second Truss Bolt Receiver
88a	First Extension Track First Receiver Hitch First Locking Lug
90a	First Extension Track Second Receiver Hitch First Locking Lug
92a	First Extension Track First Receiver Hitch Second Locking Lug
94a	First Extension Track Second Receiver Hitch Second Locking Lug
96a	First Extension Track Drive Coupler
98a	First Extension Track Drive Coupler Hub Cover
100a	First Extension Track Drive Bearing Assembly
102a	First Extension Track Drive Shaft Extension Axle
104a	(not used)
106a	First Extension Track Drive Bearing Assembly Bearing Race and Bearing
108a	First Extension Track Continuous Track
110a	First Extension Track Drive Sprocket
112a	First Extension Track Drive Shaft Extension Axle End Block
114a	First Extension Track Drive Shaft Extension Axle Receiver
116a	First Extension Track Drive Coupler Torque Plate
118a	First Extension Track Drive Coupler Hub Cover Inner Connection Flange
120a	First Extension Track Drive Coupler Hub Cover Spacer/Sidewall
122a	First Extension Track Drive Coupler Hub Cover Outer Connection Flange
124a	(not used)
126a	First Extension Track Drive Coupler Torque Plate Bolts
128a	First Extension Track First Receiver Hitch Male Portion Connection Plate
130a	First Extension Track Second Receiver Hitch Male Portion Connection Plate
132a	First Extension Track First Receiver Hitch Male Portion Connection Plate Top Follower Plate
134a	First Extension Track Second Receiver Hitch Male Portion Connection Plate Top Follower Plate
136a	Hub Cover Retainer Bolts
138a	First Extension Track Vertical Stiffener
140a	D-ring
12b	Second Extension Track Assembly
14b	Second Extension Track Frame and Frame Plate
16b	Second Extension Track First Threaded Alignment Channel
18b	Second Extension Track Second Threaded Alignment Channel
20b	Second Extension Track First Alignment Cup
22b	Second Extension Track Second Alignment Cup
24b	Second Extension Track First Receiver Hitch
26b	Second Extension Track Second Receiver Hitch
28b	Second Extension Track First Receiver Hitch Female Portion
30b	Second Extension Track Second Receiver Hitch Female Portion
32b	Second Extension Track First Receiver Hitch Male Portion
34b	Second Extension Track Second Receiver Hitch Male Portion
36b	Second Extension Track First Receiver Hitch Female Portion First End
38b	Second Extension Track Second Receiver Hitch Female Portion First End
40b	Second Extension Track First Receiver Hitch Female Portion Second End
42b	Second Extension Track Second Receiver Hitch Female Portion Second End
44b	Second Extension Track First Receiver Hitch Female Portion First Connection Flange
46b	Second Extension Track Second Receiver Hitch Female Portion First Connection Flange
48b	Second Extension Track First Receiver Hitch Female Portion Second Connection Flange
50b	Second Extension Track Second Receiver Hitch Female Portion Second Connection Flange
52b	Second Extension Track First Receiver Hitch Female Portion Receiving Aperture
54b	Second Extension Track Second Receiver Hitch Female Portion Receiving Aperture
56b	Second Extension Track First Receiver Hitch Female Portion Top Extension Flange Plate
58b	Second Extension Track Second Receiver Hitch Female Portion Top Extension Flange Plate
60b	Second Extension Track Frame Plate First Portion
62b	Second Extension Track Frame Plate Second Portion
64b	Second Extension Track Rollers
66b	(not used)
68b	Second Extension Track Receiver Hitch Female Portion Engagement Points
70b	Second Extension Track Inboard Frame Plate

-continued

DRAWING REFERENCE NUMBERS	
Ref. Nr.	Description
71b	Second Extension Track Outboard Frame Plate
72b	Second Extension Track First Receiver Hitch Female Portion First Attachment Flange Top Follower Plate
74b	Second Extension Track Second Receiver Hitch Female Portion First Attachment Flange Top Follower Plate
76b	First Truss Bolt Extension Plate
78b	Second Truss Bolt Extension Plate
80b	First Truss Bolt
82b	Second Truss Bolt
84b	First Truss Bolt Receiver
86b	Second Truss Bolt Receiver
88b	Second Extension Track First Receiver Hitch First Locking Lug
90b	Second Extension Track Second Receiver Hitch First Locking Lug
92b	Second Extension Track First Receiver Hitch Second Locking Lug
94b	Second Extension Track Second Receiver Hitch Second Locking Lug
96b	Second Extension Track Drive Coupler
98b	Second Extension Track Drive Coupler Hub Cover
100b	Second Extension Track Drive Bearing Assembly
102b	Second Extension Track Drive Shaft Extension Axle
104b	(not used)
106b	Second Extension Track Drive Bearing Assembly Bearing Race and Bearing
108b	Second Extension Track Continuous Track
110b	Second Extension Track Drive Sprocket
112b	Second Extension Track Drive Shaft Extension Axle End Block
114b	Second Extension Track Drive Shaft Extension Axle Receiver
116b	Second Extension Track Drive Coupler Torque Plate
118b	Second Extension Track Drive Coupler Hub Cover Inner Connection Flange
120b	Second Extension Track Drive Coupler Hub Cover Spacer/Sidewall
122b	Second Extension Track Drive Coupler Hub Cover Outer Connection Flange
124b	(not used)
126b	Second Extension Track Drive Coupler Torque Plate Bolts
128b	Second Extension Track First Receiver Hitch Male Portion Connection Plate
130b	Second Extension Track Second Receiver Hitch Male Portion Connection Plate
132b	Second Extension Track First Receiver Hitch Male Portion Connection Plate Top Follower Plate
134b	Second Extension Track Second Receiver Hitch Male Portion Connection Plate Top Follower Plate
136b	Second Extension Track Horizontal Stiffener
138b	Second Extension Track Vertical Stiffener
140b	D-ring

DETAILED DESCRIPTION

[0041] Before beginning a detailed description of the subject invention, mention of the following is in order. When appropriate, like reference materials and characters are used to designate identical, corresponding, or similar components in differing figure drawings. The figure drawings associated with this disclosure typically are not drawn with dimensional accuracy to scale, i.e., such drawings have been drafted with a focus on clarity of viewing and understanding rather than dimensional accuracy.

[0042] In the interest of clarity, not all of the routine features of the implementations described herein are shown and described. It will, of course, be appreciated that in the development of any such actual implementation, numerous implementation-specific decisions must be made in order to achieve the developer's specific goals, such as compliance with application- and business-related constraints, and that these specific goals will vary from one implementation to another and from one developer to another. Moreover, it will be appreciated that such a development effort might be complex and time-consuming, but would nevertheless be a routine undertaking of engineering for those of ordinary skill in the art having the benefit of this disclosure.

[0043] First and second (in the embodiment, port and starboard) extension track assemblies **12a** and **12b** are mirror images of each other. First extension track assembly **12a**, in the embodiment corresponding to the port-side of the

equipment, is shown and described in detail, labelled "a". It will be understood that second extension track assembly **12b** includes corresponding elements, labelled "b". The existing installed port and starboard tracks on the equipment used in normal operation are referred to below as the "original tracks" or "equipment lateral tracks" for simplicity, although they might not be original to the equipment.

[0044] The first extension track assembly **12a** (corresponding to the starboard side) is described in detail, with the corresponding second extension track assembly **12b** components shown in parenthesis.

[0045] As shown in FIGS. 1-27, a first embodiment of a removable universal lateral track extension system **10** is provided, including first and second extension track assemblies **12a** and **12b**, which are identical mirror-images of each other mountable on opposed sides of a tracked equipment outboard of the original lateral tracks **T1** and **T2**. Each extension track assembly **12a(b)** includes a frame plate **70a(b)**, a plurality of track rollers **64a(b)**, a drive coupler assembly **96a(b)**, a continuous track **108a(b)** and first and second receiving hitches **24a(b)** and **26a(b)**, respectively.

[0046] The extension track frame **14a(b)** includes a frame plate **70a(b)** attached rigidly to track frame **14a(b)** to provide stiffness and connectivity. In the embodiment, frame plate **70a(b)** extends from a first (forward) portion **60a(b)** to a second (aft) portion **62a(b)**, but the forward and aft portions may comprise separate portions. In the embodiment, frame plate **70a(b)** is welded to be integral with

extension track frame **14a(b)**, but may be connected by other means, or formed integrally as part of extension track frame **14a(b)**. Extension track frame plate **70a(b)** is disposed on the inboard side of the extension track frame **14a(b)**. First and second threaded alignment a(b) channels **16a(b)**, **18a(b)** extend through extension track frame outboard plate **71a(b)** and **70a(b)** to receive threaded pusher rod R, which assists in aligning and separating/mating the extension track assembly **12a(b)** to original track assembly T1, including being able to use common motorized rotary tools for assembly and disassembly. In the embodiment, first and second alignment cups **20a(b)**, **22a(b)** corresponding to first and second threaded alignment channels **16a(b)**, **18a(b)** are attached to the original track assembly T1 frame plate, each cup **20a(b)**, **22a(b)** disposed to receive the end of a threaded pusher rod extending through the respective first and second alignment channels **16a(b)**, **18a(b)**. This allows the operator to jack the extension track assembly **12a(b)** into position and maintain alignment using standard rotary tools/drivers.

[0047] In the embodiment, first and second receiver hitches **24a(b)**, **26a(b)** each include a female portion **28a(b)**, **30a(b)** and a male portion **32a(b)**, **34a(b)**. Each female portion **28a(b)**, **30a(b)** includes a receiving channel extending from a first end **36a(b)**, **38a(b)** to a second end **40a(b)**, **42a(b)**, and first and second connection flanges **44a(b)**, **46a(b)** and **48a(b)**, **50a(b)**, respectively. Each of second connection flanges, **48a(b)**, **50a(b)** includes a receiving aperture **52a(b)**, **54a(b)** having a cross section corresponding to the respective receiver hitch male portions **32a(b)**, **34a(b)**. Each male portion **32a(b)**, **34a(b)** is coupled to the extension track frame inboard plate **70a(b)** by a flange plate **128a(b)**, **130a(b)** and corresponding top follower plate **132a(b)**, **134a(b)**. In the embodiment, female portions **28a(b)**, **30a(b)** are roughly triangular in cross section, oriented apex down. Each female portion **28a(b)**, **30a(b)** includes a top extension flange plate **56a(b)**, **58a(b)** extending from their respective first ends **36a(b)**, **38a(b)** to their respective second ends **40a(b)**, **42a(b)**, the top flange plates **56a(b)**, **58a(b)** being wider than the triangular cross section to increase strength against bending and out-of-alignment torque forces. The cross section, flange and bolt arrangements are configured to not interfere with the suspension components of original track T1(T2), while providing adequate strength to the connection members. In the embodiment, male portions **32a(b)**, **34a(b)** are square-cross-section rods, the non-circular cross-sections assisting in ensuring proper alignment when connecting extension track **12a(b)** to original track T1(T2). Additionally, the engagement of the male portions **32a(b)**, **34a(b)** within the female portions **28a(b)**, **30a(b)** acts as a torque arm distributing torque loads throughout the first and second receiver hitches **24a(b)**, **26a(b)** rather than concentrating such loads on the flange faces and bolts, to reduce risk of fatigue failures.

[0048] Each female portion **28a(b)**, **30a(b)** includes first and second attachment flanges **44a(b)**, **46a(b)** and **48a(b)**, **50a(b)**, each having a plurality of threaded couplers **68a(b)** to rigidly connect the receiver hitch female portion **28a(b)**, **30a(b)** to the original track frame plate P1(P2) and extension track frame inboard plate **70a(b)**, respectively. Each of first attachment flanges **44a(b)**, **46a(b)**, which couple directly to the original track frame plate P1(P2), include a top follower plate **72a(b)**, **74a(b)** extending along the top edges of first attachment flanges **44a(b)**, **46a(b)** which are bolted to the top horizontal portion of the original track frame plate

P1(P2), providing additional strength and assisting in alignment and transferring torque loads from the extension track connectors to the original track suspension. In the embodiment, first (forward) attachment flange **44a(b)** and corresponding top follower plate **72a(b)** are wider than second (aft) attachment flange **46a(b)** and second attachment flange follower plate **74a(b)**, in order to absorb the additional forces typically imposed by impacts on the forward part of the track suspensions.

[0049] The assembled length of receiving hitches **24a(b)** and **26a(b)** define the lateral displacement of lateral track extension system 10.

[0050] In the embodiment, the engagement points **68a(b)** are threaded nuts welded to the backside of track frame plate P1(P2) to receive threaded bolts. In the embodiment, threaded bolts are selected to match the original track T1(T2) attachment bolts as much as possible, for ease of logistics. First and second truss bolt extension plates **76a(b)**, **78a(b)** are added to the original track frame plate P1(P2) to provide connection points for corresponding first and second truss bolts **80a(b)**, **82a(b)** without interfering with the original track suspension layout. This is dependent on the particular arrangement of the original track suspension.

[0051] First and second truss bolts **80a(b)**, **82a(b)** extend through first and second receiver hitches **24a(b)**, **26a(b)** and engage corresponding first and second truss bolt receivers **84a(b)**, **86a(b)**, respectively, provided on original track frame plate P1(P2). Truss bolts **80a(b)**, **82a(b)** pass through receiver hitch male portions **32a(b)**, **34a(b)**. In the embodiment, original track T1(T2) was modified by boring first and second truss bolt receivers **84a(b)**, **86a(b)** and welding backing nuts over the holes to provide adequate strength and thread depth. In the embodiment, first and second truss bolts **80a(b)**, **82a(b)** are 7/8 inch stainless steel bolts to provide adequate strength and corrosion resistance.

[0052] Each of first and second receiver hitches **24a(b)**, **26a(b)** include first and second locking lugs **88a(b)**, **90a(b)** and **92a(b)**, **94a(b)**, respectively, which assist in holding the male portions **32a(b)**, **34a(b)** of first and second receiver hitches **24a(b)**, **26a(b)** in place and reduce vibration during operation.

[0053] In the embodiment, the male portion **34a(b)** of second receiver hitch **26a(b)** is slightly longer than male portion **32a(b)** of first receiver hitch **24a(b)**, which is in turn slightly longer than drive shaft extension axle **102a(b)** of drive coupler **96a(b)**, which makes alignment easier during installation—each respective portion couples at a different moment so all parts don't have to be precisely lined up at when commencing the coupling procedure.

[0054] In the embodiment, D-rings **140a(b)** are coupled to first and second receiver hitch female portions **28a(b)**, **30a(b)**, which allow use of overhead support to assist in installation and removal.

[0055] The extension track system 10 includes a drive coupler **96a(b)**. Drive coupler **96a(b)** includes a hub cover **98a(b)** which couples to the original track drive sprocket D1(D2) on the equipment side, a drive bearing assembly **100a(b)** in the extension track assembly **12a(b)**, and an extension axle **102a(b)** which rotatably couples hub cover/torque plate **98a(b)**/**116a(b)** to drive bearing assembly **100a(b)**. In the embodiment, the drive bearing assembly **100a(b)** includes a bearing hub/race and double bearing **106a(b)** (not visible in figures) coupled to a drive sprocket, which replaces the planetary gear assembly of a stock replacement

track assembly. Drive bearing assembly **100a(b)** transmits the torque received from the original track drive sprocket **D1(D2)** through extension axle **102a(b)** to the continuous track **108a(b)** of extension track assembly **12a(b)** via the extension track assembly drive sprocket **110a(b)**. Extension axle **102a(b)** is keyed to a rotating bearing coupled to the extension track drive sprocket **110a(b)**. Extension axle **102a(b)** includes a square end block **112a(b)**, corresponding to the square receiver **114a(b)** of drive coupler torque plate **116a(b)**. The square shape transmits torque to the extension axle **102a(b)**, but other shapes could be used, for example oval, star and other shapes.

[0056] In the embodiment, drive coupler **96a(b)** includes a hub cover **98a(b)** coupled to the rotating portion of original track drive sprocket **D1(D2)**, over the drive sprocket. Hub cover **98a(b)** includes an inner connection flange **118a(b)** which couples directly to the drive sprocket **D1(D2)** base portion, a spacer/sidewall **120a(b)** extending out from the inner connection flange **118a(b)**, and an outer connection flange **122a(b)**. In the embodiment, outer connection flange **122a(b)** is closed, but may be open to provide direct access to the drive sprocket **D1(D2)** for inspection and maintenance without having to remove the hub cover **98a(b)**. However, the having outer connection flange **122a(b)** closed prevents debris from getting into the drive sprocket/hub assembly. The hub cover assembly **98a(b)** can be left installed when the extension track assembly **12a(b)** is not attached without interfering with normal operation of the equipment.

[0057] Drive coupler torque plate **116a(b)** is coupled to hub cover outer connection flange **122a(b)** by threaded bolts **126a(b)**. The threaded bolt holes are aligned with hub cover inner flange **118a(b)** retainer bolts and sized to provide access through the bolt holes to the bolts connecting the hub cover inner flange **118a(b)** to the drive sprocket assembly **D1(D2)**. The retainer bolts **136a(b)** connecting hub cover **98a(b)** to drive sprocket **D1(D2)** through inner flange **118a(b)** utilize the original drive sprocket retainer bolt holes, so are the same thread but longer than the original drive sprocket connector bolts.

[0058] Drive coupler hub cover **98a(b)** may include bolt sleeves (not shown) extending between the hub cover inner connection flange **118a(b)** and outer connection flange **122a(b)** to retain the connector bolts and make installation and removal easier.

[0059] Extension track assembly **12a(b)** can be used for any piece of equipment with original track **T1(T2)** having a matching track pitch. The connector arrangement for the first and second receiver hitch female portion first attachment flanges **44a(b)**, **46a(b)**, and the connector/bolt pattern and size of the drive coupler hub cover **98**, may be varied to accommodate the particular model/internal arrangement of the original track **T1(T2)**, which varies for families of tracked equipment, such that a particular size of extension track assembly **12a(b)** could be universally adaptable to any similarly sized tracked equipment.

[0060] In the embodiment, the extension track assembly **12a(b)** is laterally displaced approximately six inches from the original track **T1(T2)**. This displacement provide a substantial increase in lateral stability, but the inventors have also found that this spacing, which is slightly less than the continuous track width, also provides additional effective floatation due to the compression of compactible/semi-compactible ground/surface material between the tracks. Therefore, the increased floatation effect (i.e. reduced

ground pressure) is greater than indicated by merely adding the additional track surface area (sometimes referred to as the “bridging effect”). However, the selected lateral displacement of the extension track system **10** may be varied for particular applications. Greater lateral displacement may require additional supporting members. The extension track system may include horizontal stiffeners, **138a** and **138b**, coupling first extension track first receiver hitch **24a** to first extension track second receiving hitch **26a**, and second extension track first receiver hitch **24b** to second extension track second receiving hitch **26b**, respectively, in order to provide increased rigidity to the system.

[0061] The extension track system may include vertical stiffeners, **138a** and **138b**, couplable between first extension track first and second receiving hitches **24a** and **26a**, and second extension track first and second receiving hitches **24b** and **26b**, respectively, to the equipment superstructure, to provide increased load support to the system, especially for applications where the equipment is being used to span open channels, such that extension track assemblies **12a**, **12b** are anticipated to engage either side of the channel with the original tracks **T1**, **T2** unsupported over the open portion of the channel.

[0062] As demonstrated in FIGS. 1-27, the removable track extension system **10** can be installed and removed without having to use jacks to raise the equipment completely off the floor—merely unloading the suspension is sufficient to allow the extension assemblies to be moved into alignment and coupled to the respective lateral tracks.

[0063] Referring to FIGS. 1-27, a universal removable extension track system may include a tracked vehicle having opposed first and second lateral tracks with first and second alignment cups **18a(b)** and **20a(b)** and attachment points **68a(b)** provided, in combination with a first and second extension track assembly **12a** and **12b**.

[0064] Those skilled in the art will recognize that numerous modifications and changes may be made to the preferred embodiment without departing from the scope of the claimed invention. It will, of course, be understood that modifications of the invention, in its various aspects, will be apparent to those skilled in the art, some being apparent only after study, others being matters of routine mechanical, chemical and electronic design. No single feature, function or property of the preferred embodiment is essential. Other embodiments are possible, their specific designs depending upon the particular application. As such, the scope of the invention should not be limited by the particular embodiments herein described but should be defined only by the appended claims and equivalents thereof.

We claim:

1. A universal removable lateral track extension system for tracked equipment, the tracked equipment including a forward end and aft end, first lateral track with a first lateral track frame plate, a plurality of track rollers, a drive sprocket assembly, and a continuous track, the first extension track assembly extending from a forward end to an aft end and removably couplable to and outboard of the first lateral track at a selected displacement width, the first extension track assembly comprising:

a first extension track frame and a first extension track frame plate extending from a first extension track frame plate first portion corresponding to a forward portion of the first extension track frame to a first extension track frame plate second portion corresponding to an aft

- portion of the first extension track frame, the first extension track frame plate including a first and second threaded alignment channels disposed in the first extension track frame plate first and second portions, respectively;
- a plurality of first extension track rollers rotatably coupled to the first extension track frame plate;
 - a first extension track first receiving hitch couplable between the first extension track frame plate first portion and the first lateral track frame plate, and a first extension track second receiving hitch couplable between the first extension track frame plate second portion and first lateral track frame plate, each of the first extension track first and second receiving hitches of the same length and defining the lateral displacement of the lateral track extension system;
 - a first extension track drive coupler couplable to the first lateral track drive sprocket assembly; and,
 - a first extension track continuous track extending around the first extension track drive coupler and track rollers.
2. The system of claim 1, further comprising:
- first extension track first and second alignment cups connected to the first lateral track frame plate proximate the forward and aft ends, respectively, the first extension track first and second alignment cups positioned to align with the corresponding first extension track first and second threaded alignment channels.
3. The system of claim 2, further comprising:
- the first extension track drive coupler including a first extension track drive bearing assembly and connected first extension track drive sprocket in line with the first extension track rollers, a first extension track drive sprocket connector connectable to the first lateral track drive sprocket assembly, and a first extension track extension axle removably couplable from the first extension track drive sprocket connector to the first extension track drive bearing assembly.
4. The system of claim 3, further comprising:
- the tracked equipment further including a second lateral track opposite and mirroring the first lateral track and including a second lateral track frame plate, a plurality of track rollers, a second lateral track drive sprocket assembly, and a second lateral track continuous track,
 - a second extension track assembly comprising a mirror image of the first extension track and extending from a forward end to an aft end and removably couplable to and outboard of the second lateral track at the selected displacement width, the second extension track assembly further comprising:
 - a second extension track frame and a second extension track frame plate extending from a second extension track frame plate first portion corresponding to a forward portion of the second extension track frame to a second extension track frame plate second portion corresponding to an aft portion of the second extension track frame, the second extension track frame plate including a first and second threaded alignment channels disposed in the second extension track frame plate first and second portions, respectively;
 - second extension track first and second alignment cups connected to the second lateral track frame plate proximate the forward and aft ends, respectively, the second extension track first and second alignment cups positioned to align with the corresponding second extension track first and second threaded alignment channels;
 - a plurality of second extension track rollers rotatably coupled to the second extension track frame plate;
 - a second extension track first receiving hitch couplable between the second extension track frame plate first portion and the second lateral track frame plate, and a second extension track second receiving hitch couplable between the second extension track frame plate second portion and second lateral track frame plate, each of the second extension track first and second receiving hitches of the same length and defining the lateral displacement of the lateral track extension system;
 - a second extension track drive coupler couplable to the second lateral track drive sprocket assembly, the second extension track drive coupler including a second extension track drive bearing assembly and connected second extension track drive sprocket in line with the second extension track rollers, a second extension track drive sprocket connector connectable to the second lateral track drive sprocket assembly, and a second extension track extension axle removably couplable from the second extension track drive sprocket connector to the second extension track drive bearing assembly; and,
 - a second extension track continuous track extending around the second extension track drive coupler and track rollers.
5. The apparatus in claim 4, further comprising:
- a tracked vehicle including the first and second opposed lateral tracks configured to removably receive the first and second extension track assemblies.
6. The apparatus in claim 4, further comprising:
- the first and second extension track assemblies further including respective first and second extension track horizontal stiffeners, each horizontal stiffener comprising first and second stiffener members couplable between the lateral tracks and extension track assembly frame plate, wherein the horizontal stiffener first and second stiffener members of the respective first and second extension track horizontal stiffeners are coupled together in a horizontal crisscross orientation.
7. The apparatus in claim 4, further comprising:
- the first and second extension track assemblies further including respective first and second extension track vertical stiffeners, each of the respective first and second extension track vertical stiffeners including one or more stiffener members couplable between the respective first and second extension track assembly frame plates and a respective lateral location on a tracked vehicle to receive the first and second track extensions, each of the respective lateral locations disposed higher than the respective first and second extension track frame plates.

* * * * *